

Guangzhou iMagnetics Electronics Co., LTD
广州爱磁电子有限公司

Encapsulated Transformers 低频灌封变压器



Encapsulated Transformers/低频灌封变压器

Index/索引	Page/页
1. EE20/6.1 – 0.35VA	1
2. EE20/10.5 – 0.5VA	2
3. EI28/12 – 1.0VA	3
4. EI28/15 – 1.5VA	4
5. EI28/18 – 2.0VA	5
6. EI30/5 – 0.5VA	6
7. EI30/8 – 0.8VA	7
8. EI30/10.5 – 1.0VA	8
9. EI30/12.5 – 1.5VA	9
10. EI30/15.5 – 2.0VA	10
11. EI30/18 – 2.3VA	11
12. EI30/23 – 2.8VA	12
13. EI35/15 – 3.5VA	13
14. EI35/18 – 4.0VA	14
15. EI38/13.6 – 3.2VA	15
16. EI38/13.6 – 4.5VA	16
17. EI42/14.8A – 5.0VA	17
18. EI42/14.8B – 5.0VA	18
19. EI42/20 – 8.0VA	19
20. EI48/12 – 4.0VA	20
21. EI48/16.8 – 10.0VA	21
22. EI48/18.6 – 11.0VA	22
23. EI48/20 – 12.0VA	23
24. EI54/18.8 – 16.0VA	24
25. UI30/115V – 2~10VA	25
26. UI30/230V – 2~10VA	26
27. UI39/115V – 10~30VA	27
28. UI39/230V – 10~30VA	28

Type

Power


EE20/6.1 0.35VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design Winding
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 25 grams


Accrding to:



Dimension in mm:




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM2006S-2-040-0035	230v~	4	87.5	1+4/6+7	6.5	1
IM2006S-2-060-0035	230v~	6	58.3	1+4/6+7	9.7	1
IM2006S-2-090-0035	230v~	9	38.8	1+4/6+7	14.7	1
IM2006S-2-120-0035	230v~	12	29.1	1+4/6+7	20.0	1
IM2006S-2-150-0035	230v~	15	23.3	1+4/6+7	26.1	1
IM2006S-2-180-0035	230v~	18	19.4	1+4/6+7	31.3	1
IM2006S-2-240-0035	230v~	24	14.5	1+4/6+7	40.3	1
IM2006D-2-060-0035	230v~	2× 6	2×29.1	1+4/5+6-7+8	2×10.5	2
IM2006D-2-090-0035	230v~	2× 9	2×19.4	1+4/5+6-7+8	2×15.7	2
IM2006D-2-120-0035	230v~	2×12	2×14.5	1+4/5+6-7+8	2×20.2	2
IM2006D-2-150-0035	230v~	2×15	2×11.6	1+4/5+6-7+8	2×29.8	2
IM2006D-2-180-0035	230v~	2×18	2×9.7	1+4/5+6-7+8	2×35.7	2
IM2006D-2-240-0035	230v~	2×24	2×7.2	1+4/5+6-7+8	2×40.6	2
IM2006S-1-040-0035	115v~	4	87.5	1+4/6+7	6.5	1
IM2006S-1-060-0035	115v~	6	58.3	1+4/6+7	9.7	1
IM2006S-1-090-0035	115v~	9	38.8	1+4/6+7	14.7	1
IM2006S-1-120-0035	115v~	12	29.1	1+4/6+7	20.0	1
IM2006S-1-150-0035	115v~	15	23.3	1+4/6+7	26.1	1
IM2006S-1-180-0035	115v~	18	19.4	1+4/6+7	31.3	1
IM2006S-1-240-0035	115v~	24	14.5	1+4/6+7	40.3	1
IM2006D-1-060-0035	115v~	2× 6	2×29.1	1+4/5+6-7+8	2×10.5	2
IM2006D-1-090-0035	115v~	2× 9	2×19.4	1+4/5+6-7+8	2×15.7	2
IM2006D-1-120-0035	115v~	2×12	2×14.5	1+4/5+6-7+8	2×20.2	2
IM2006D-1-150-0035	115v~	2×15	2×11.6	1+4/5+6-7+8	2×29.8	2
IM2006D-1-180-0035	115v~	2×18	2×9.7	1+4/5+6-7+8	2×35.7	2
IM2006D-1-240-0035	115v~	2×24	2×7.2	1+4/5+6-7+8	2×40.6	2

No. 1



No. 2



Type

Power


EE20/10.5 0.5VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Winding
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 35 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM2010S-2-040-0050	230v~	4	125.0	1+4/6+7	7.5	1
IM2010S-2-060-0050	230v~	6	83.3	1+4/6+7	11.0	1
IM2010S-2-090-0050	230v~	9	55.5	1+4/6+7	16.5	1
IM2010S-2-120-0050	230v~	12	41.6	1+4/6+7	20.6	1
IM2010S-2-150-0050	230v~	15	33.3	1+4/6+7	26.0	1
IM2010S-2-180-0050	230v~	18	27.8	1+4/6+7	31.1	1
IM2010S-2-240-0050	230v~	24	20.8	1+4/6+7	41.1	1
IM2010D-2-060-0050	230v~	2×6	2×41.6	1+4/5+6-7+8	2×10.9	2
IM2010D-2-090-0050	230v~	2×9	2×27.7	1+4/5+6-7+8	2×16.4	2
IM2010D-2-120-0050	230v~	2×12	2×20.8	1+4/5+6-7+8	2×20.6	2
IM2010D-2-150-0050	230v~	2×15	2×16.6	1+4/5+6-7+8	2×25.8	2
IM2010D-2-180-0050	230v~	2×18	2×13.8	1+4/5+6-7+8	2×30.9	2
IM2010D-2-240-0050	230v~	2×24	2×10.4	1+4/5+6-7+8	2×41.3	2
IM2010S-1-040-0050	115v~	4	125.0	1+4/6+7	7.5	1
IM2010S-1-060-0050	115v~	6	83.3	1+4/6+7	11.0	1
IM2010S-1-090-0050	115v~	9	55.5	1+4/6+7	16.5	1
IM2010S-1-120-0050	115v~	12	41.6	1+4/6+7	20.6	1
IM2010S-1-150-0050	115v~	15	33.3	1+4/6+7	26.0	1
IM2010S-1-180-0050	115v~	18	27.8	1+4/6+7	31.1	1
IM2010S-1-240-0050	115v~	24	20.8	1+4/6+7	41.1	1
IM2010D-1-060-0050	115v~	2×6	2×41.6	1+4/5+6-7+8	2×10.9	2
IM2010D-1-090-0050	115v~	2×9	2×27.7	1+4/5+6-7+8	2×16.4	2
IM2010D-1-120-0050	115v~	2×12	2×20.8	1+4/5+6-7+8	2×20.6	2
IM2010D-1-150-0050	115v~	2×15	2×16.6	1+4/5+6-7+8	2×25.8	2
IM2010D-1-180-0050	115v~	2×18	2×13.8	1+4/5+6-7+8	2×30.9	2
IM2010D-1-240-0050	115v~	2×24	2×10.4	1+4/5+6-7+8	2×41.3	2

No. 1



No. 2



Type

Power


EI28/12 1.0VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 75 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM2812S-2-060-0100	230v~	6	166.0	1+5/7+9	8.5	1
IM2812S-2-090-0100	230v~	9	111.0	1+5/7+9	12.5	1
IM2812S-2-120-0100	230v~	12	84.0	1+5/7+9	16.3	1
IM2812S-2-150-0100	230v~	15	66.0	1+5/7+9	20.2	1
IM2812S-2-180-0100	230v~	18	55.0	1+5/7+9	24.2	1
IM2812S-2-240-0100	230v~	24	42.0	1+5/7+9	32.2	1
IM2812D-2-060-0100	230v~	2× 6	2×84.0	1+5/6+7-9+10	2×8.3	2
IM2812D-2-075-0100	230v~	2× 7.5	2×66.6	1+5/6+7-9+10	2×10.5	2
IM2812D-2-090-0100	230v~	2× 9	2×55.0	1+5/6+7-9+10	2×11.9	2
IM2812D-2-120-0100	230v~	2×12	2×42.0	1+5/6+7-9+10	2×16.2	2
IM2812D-2-150-0100	230v~	2×15	2×33.0	1+5/6+7-9+10	2×20.4	2
IM2812D-2-180-0100	230v~	2×18	2×28.0	1+5/6+7-9+10	2×24.2	2
IM2812D-2-240-0100	230v~	2×24	2×21.0	1+5/6+7-9+10	2×32.1	2
IM2812S-1-060-0100	115v~	6	166.0	1+5/7+9	8.5	1
IM2812S-1-090-0100	115v~	9	111.0	1+5/7+9	12.5	1
IM2812S-1-120-0100	115v~	12	84.0	1+5/7+9	16.3	1
IM2812S-1-150-0100	115v~	15	66.0	1+5/7+9	20.2	1
IM2812S-1-180-0100	115v~	18	55.0	1+5/7+9	24.2	1
IM2812S-1-240-0100	115v~	24	42.0	1+5/7+9	32.2	1
IM2812D-1-060-0100	115v~	2× 6	2×84.0	1+5/6+7-9+10	2×8.3	2
IM2812D-1-075-0100	115v~	2× 7.5	2×66.6	1+5/6+7-9+10	2×10.5	2
IM2812D-1-090-0100	115v~	2× 9	2×55.0	1+5/6+7-9+10	2×11.9	2
IM2812D-1-120-0100	115v~	2×12	2×42.0	1+5/6+7-9+10	2×16.2	2
IM2812D-1-150-0100	115v~	2×15	2×33.0	1+5/6+7-9+10	2×20.4	2
IM2812D-1-180-0100	115v~	2×18	2×28.0	1+5/6+7-9+10	2×24.2	2
IM2812D-1-240-0100	115v~	2×24	2×21.0	1+5/6+7-9+10	2×32.1	2
IM2812S-1*-060-0100	2*115v~	6	166.0	1+2-4+5/7+9	8.5	3
IM2812S-1*-090-0100	2*115v~	9	111.0	1+2-4+5/7+9	12.5	3
IM2812S-1*-120-0100	2*115v~	12	84.0	1+2-4+5/7+9	16.3	3
IM2812S-1*-150-0100	2*115v~	15	66.0	1+2-4+5/7+9	20.2	3
IM2812S-1*-180-0100	2*115v~	18	55.0	1+2-4+5/7+9	24.2	3
IM2812S-1*-240-0100	2*115v~	24	42.0	1+2-4+5/7+9	32.2	3
IM2812D-1*-060-0100	2*115v~	2× 6	2×84.0	1+2-4+5/6+7-9+10	2×8.3	4
IM2812D-1*-090-0100	2*115v~	2× 9	2×55.0	1+2-4+5/6+7-9+10	2×11.9	4
IM2812D-1*-120-0100	2*115v~	2×12	2×42.0	1+2-4+5/6+7-9+10	2×16.2	4
IM2812D-1*-150-0100	2*115v~	2×15	2×33.0	1+2-4+5/6+7-9+10	2×20.4	4
IM2812D-1*-180-0100	2*115v~	2×18	2×28.0	1+2-4+5/6+7-9+10	2×24.2	4
IM2812D-1*-240-0100	2*115v~	2×24	2×21.0	1+2-4+5/6+7-9+10	2×32.1	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI28/15 1.5VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 90 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM2815S-2-060-0150	230v~	6	250.0	1+5/7+9	8.5	1
IM2815S-2-090-0150	230v~	9	166.0	1+5/7+9	12.5	1
IM2815S-2-120-0150	230v~	12	125.0	1+5/7+9	16.3	1
IM2815S-2-150-0150	230v~	15	100.0	1+5/7+9	20.2	1
IM2815S-2-180-0150	230v~	18	83.0	1+5/7+9	24.2	1
IM2815S-2-240-0150	230v~	24	63.0	1+5/7+9	32.2	1
IM2815D-2-060-0150	230v~	2× 6	2×125.0	1+5/6+7-9+10	2×8.3	2
IM2815D-2-075-0150	230v~	2× 7.5	2×100.0	1+5/6+7-9+10	2×10.5	2
IM2815D-2-090-0150	230v~	2× 9	2×83.0	1+5/6+7-9+10	2×11.9	2
IM2815D-2-120-0150	230v~	2×12	2×63.0	1+5/6+7-9+10	2×16.2	2
IM2815D-2-150-0150	230v~	2×15	2×50.0	1+5/6+7-9+10	2×20.4	2
IM2815D-2-180-0150	230v~	2×18	2×41.6	1+5/6+7-9+10	2×24.2	2
IM2815D-2-240-0150	230v~	2×24	2×31.0	1+5/6+7-9+10	2×32.1	2
IM2815S-1-060-0150	115v~	6	250.0	1+5/7+9	8.5	1
IM2815S-1-090-0150	115v~	9	166.0	1+5/7+9	12.5	1
IM2815S-1-120-0150	115v~	12	125.0	1+5/7+9	16.3	1
IM2815S-1-150-0150	115v~	15	100.0	1+5/7+9	20.2	1
IM2815S-1-180-0150	115v~	18	83.0	1+5/7+9	24.2	1
IM2815S-1-240-0150	115v~	24	63.0	1+5/7+9	32.2	1
IM2815D-1-060-0150	115v~	2× 6	2×125.0	1+5/6+7-9+10	2×8.3	2
IM2815D-1-075-0150	115v~	2× 7.5	2×100.0	1+5/6+7-9+10	2×10.5	2
IM2815D-1-090-0150	115v~	2× 9	2×83.0	1+5/6+7-9+10	2×11.9	2
IM2815D-1-120-0150	115v~	2×12	2×63.0	1+5/6+7-9+10	2×16.2	2
IM2815D-1-150-0150	115v~	2×15	2×50.0	1+5/6+7-9+10	2×20.4	2
IM2815D-1-180-0150	115v~	2×18	2×41.6	1+5/6+7-9+10	2×24.2	2
IM2815D-1-240-0150	115v~	2×24	2×31.0	1+5/6+7-9+10	2×32.1	2
IM2815S-1*-060-0150	2*115v~	6	250.0	1+2-4+5/7+9	8.5	3
IM2815S-1*-090-0150	2*115v~	9	166.0	1+2-4+5/7+9	12.5	3
IM2815S-1*-120-0150	2*115v~	12	125.0	1+2-4+5/7+9	16.3	3
IM2815S-1*-150-0150	2*115v~	15	100.0	1+2-4+5/7+9	20.2	3
IM2815S-1*-180-0150	2*115v~	18	83.0	1+2-4+5/7+9	24.2	3
IM2815S-1*-240-0150	2*115v~	24	63.0	1+2-4+5/7+9	32.2	3
IM2815D-1*-060-0150	2*115v~	2× 6	2×125.0	1+2-4+5/6+7-9+10	2×8.3	4
IM2815D-1*-090-0150	2*115v~	2× 9	2×83.0	1+2-4+5/6+7-9+10	2×11.9	4
IM2815D-1*-120-0150	2*115v~	2×12	2×63.0	1+2-4+5/6+7-9+10	2×16.2	4
IM2815D-1*-150-0150	2*115v~	2×15	2×50.0	1+2-4+5/6+7-9+10	2×20.4	4
IM2815D-1*-180-0150	2*115v~	2×18	2×41.6	1+2-4+5/6+7-9+10	2×24.2	4
IM2815D-1*-240-0150	2*115v~	2×24	2×31.0	1+2-4+5/6+7-9+10	2×32.1	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI28/18 2.0VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 108 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM2818S-2-060-0200	230v~	6	333.0	1+5/7+9	10.5	1
IM2818S-2-090-0200	230v~	9	222.0	1+5/7+9	15.0	1
IM2818S-2-120-0200	230v~	12	166.0	1+5/7+9	20.0	1
IM2818S-2-150-0200	230v~	15	133.0	1+5/7+9	26.0	1
IM2818S-2-180-0200	230v~	18	111.0	1+5/7+9	30.0	1
IM2818S-2-240-0200	230v~	24	83.0	1+5/7+9	38.0	1
IM2818D-2-060-0200	230v~	2× 6	2×166.0	1+5/6+7-9+10	2×10.5	2
IM2818D-2-075-0200	230v~	2× 7.5	2×133.0	1+5/6+7-9+10	2×13.0	2
IM2818D-2-090-0200	230v~	2× 9	2×111.0	1+5/6+7-9+10	2×15.0	2
IM2818D-2-120-0200	230v~	2×12	2×83.0	1+5/6+7-9+10	2×20.0	2
IM2818D-2-150-0200	230v~	2×15	2×66.0	1+5/6+7-9+10	2×24.5	2
IM2818D-2-180-0200	230v~	2×18	2×55.0	1+5/6+7-9+10	2×29.5	2
IM2818D-2-240-0200	230v~	2×24	2×42.0	1+5/6+7-9+10	2×36.5	2
IM2818S-1-060-0200	115v~	6	333.0	1+5/7+9	10.5	1
IM2818S-1-090-0200	115v~	9	222.0	1+5/7+9	15.0	1
IM2818S-1-120-0200	115v~	12	166.0	1+5/7+9	20.0	1
IM2818S-1-150-0200	115v~	15	133.0	1+5/7+9	26.0	1
IM2818S-1-180-0200	115v~	18	111.0	1+5/7+9	30.0	1
IM2818S-1-240-0200	115v~	24	83.0	1+5/7+9	38.0	1
IM2818D-1-060-0200	115v~	2× 6	2×166.0	1+5/6+7-9+10	2×10.5	2
IM2818D-1-075-0200	115v~	2× 7.5	2×133.0	1+5/6+7-9+10	2×13.0	2
IM2818D-1-090-0200	115v~	2× 9	2×111.0	1+5/6+7-9+10	2×15.0	2
IM2818D-1-120-0200	115v~	2×12	2×83.0	1+5/6+7-9+10	2×20.0	2
IM2818D-1-150-0200	115v~	2×15	2×66.0	1+5/6+7-9+10	2×24.5	2
IM2818D-1-180-0200	115v~	2×18	2×55.0	1+5/6+7-9+10	2×29.5	2
IM2818D-1-240-0200	115v~	2×24	2×42.0	1+5/6+7-9+10	2×36.5	2
IM2818S-1*-060-0200	2*115v~	6	333.0	1+2-4+5/7+9	10.5	3
IM2818S-1*-090-0200	2*115v~	9	222.0	1+2-4+5/7+9	15.0	3
IM2818S-1*-120-0200	2*115v~	12	166.0	1+2-4+5/7+9	20.0	3
IM2818S-1*-150-0200	2*115v~	15	133.0	1+2-4+5/7+9	26.0	3
IM2818S-1*-180-0200	2*115v~	18	111.0	1+2-4+5/7+9	30.0	3
IM2818S-1*-240-0200	2*115v~	24	83.0	1+2-4+5/7+9	38.0	3
IM2818D-1*-060-0200	2*115v~	2× 6	2×166.0	1+2-4+5/6+7-9+10	2×10.5	4
IM2818D-1*-090-0200	2*115v~	2× 9	2×111.0	1+2-4+5/6+7-9+10	2×15.0	4
IM2818D-1*-120-0200	2*115v~	2×12	2×83.0	1+2-4+5/6+7-9+10	2×20.0	4
IM2818D-1*-150-0200	2*115v~	2×15	2×66.0	1+2-4+5/6+7-9+10	2×24.5	4
IM2818D-1*-180-0200	2*115v~	2×18	2×55.0	1+2-4+5/6+7-9+10	2×29.5	4
IM2818D-1*-240-0200	2*115v~	2×24	2×42.0	1+2-4+5/6+7-9+10	2×36.5	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI30/5 0.5VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 43 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3005S-2-060-0050	230v~	6	83.3	1+5/7+9	9.7	1
IM3005S-2-090-0050	230v~	9	55.5	1+5/7+9	14.1	1
IM3005S-2-120-0050	230v~	12	41.6	1+5/7+9	20.5	1
IM3005S-2-150-0050	230v~	15	33.3	1+5/7+9	24.6	1
IM3005S-2-180-0050	230v~	18	27.5	1+5/7+9	28.4	1
IM3005S-2-240-0050	230v~	24	20.8	1+5/7+9	37.0	1
IM3005D-2-060-0050	230v~	2×6	2×41.0	1+5/6+7-9+10	2×10.1	2
IM3005D-2-075-0050	230v~	2×7.5	2×33.0	1+5/6+7-9+10	2×12.3	2
IM3005D-2-090-0050	230v~	2×9	2×27.5	1+5/6+7-9+10	2×15.6	2
IM3005D-2-120-0050	230v~	2×12	2×20.0	1+5/6+7-9+10	2×19.9	2
IM3005D-2-150-0050	230v~	2×15	2×16.5	1+5/6+7-9+10	2×23.3	2
IM3005D-2-180-0050	230v~	2×18	2×13.8	1+5/6+7-9+10	2×27.9	2
IM3005D-2-240-0050	230v~	2×24	2×10.4	1+5/6+7-9+10	2×37.2	2
IM3005S-1-060-0050	115v~	6	83.3	1+5/7+9	9.7	1
IM3005S-1-090-0050	115v~	9	55.5	1+5/7+9	14.1	1
IM3005S-1-120-0050	115v~	12	41.6	1+5/7+9	20.5	1
IM3005S-1-150-0050	115v~	15	33.3	1+5/7+9	24.6	1
IM3005S-1-180-0050	115v~	18	27.5	1+5/7+9	28.4	1
IM3005S-1-240-0050	115v~	24	20.8	1+5/7+9	37.0	1
IM3005D-1-060-0050	115v~	2×6	2×41.0	1+5/6+7-9+10	2×10.1	2
IM3005D-1-075-0050	115v~	2×7.5	2×33.0	1+5/6+7-9+10	2×12.3	2
IM3005D-1-090-0050	115v~	2×9	2×27.5	1+5/6+7-9+10	2×15.6	2
IM3005D-1-120-0050	115v~	2×12	2×20.0	1+5/6+7-9+10	2×19.9	2
IM3005D-1-150-0050	115v~	2×15	2×16.5	1+5/6+7-9+10	2×23.3	2
IM3005D-1-180-0050	115v~	2×18	2×13.8	1+5/6+7-9+10	2×27.9	2
IM3005D-1-240-0050	115v~	2×24	2×10.4	1+5/6+7-9+10	2×37.2	2
IM3005S-1*-060-0050	2*115v~	6	83.3	1+2-4+5/7+9	9.7	3
IM3005S-1*-090-0050	2*115v~	9	55.5	1+2-4+5/7+9	14.1	3
IM3005S-1*-120-0050	2*115v~	12	41.6	1+2-4+5/7+9	20.5	3
IM3005S-1*-150-0050	2*115v~	15	33.3	1+2-4+5/7+9	24.6	3
IM3005S-1*-180-0050	2*115v~	18	27.5	1+2-4+5/7+9	28.4	3
IM3005S-1*-240-0050	2*115v~	24	20.8	1+2-4+5/7+9	37.0	3
IM3005D-1*-060-0050	2*115v~	2×6	2×41.0	1+2-4+5/6+7-9+10	2×10.1	4
IM3005D-1*-090-0050	2*115v~	2×9	2×27.5	1+2-4+5/6+7-9+10	2×15.6	4
IM3005D-1*-120-0050	2*115v~	2×12	2×20.8	1+2-4+5/6+7-9+10	2×19.9	4
IM3005D-1*-150-0050	2*115v~	2×15	2×16.5	1+2-4+5/6+7-9+10	2×23.3	4
IM3005D-1*-180-0050	2*115v~	2×18	2×13.8	1+2-4+5/6+7-9+10	2×27.9	4
IM3005D-1*-240-0050	2*115v~	2×24	2×10.4	1+2-4+5/6+7-9+10	2×37.2	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI30/8 0.8VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 58 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3008S-2-060-0080	230v~	6	133.0	1+5/7+9	8.5	1
IM3008S-2-090-0080	230v~	9	89.0	1+5/7+9	12.5	1
IM3008S-2-120-0080	230v~	12	66.0	1+5/7+9	16.3	1
IM3008S-2-150-0080	230v~	15	53.0	1+5/7+9	20.2	1
IM3008S-2-180-0080	230v~	18	44.0	1+5/7+9	24.2	1
IM3008S-2-240-0080	230v~	24	33.0	1+5/7+9	32.2	1
IM3008D-2-060-0080	230v~	2×6	2×66.0	1+5/6+7-9+10	2×8.3	2
IM3008D-2-075-0080	230v~	2×7.5	2×53.0	1+5/6+7-9+10	2×10.5	2
IM3008D-2-090-0080	230v~	2×9	2×44.0	1+5/6+7-9+10	2×11.9	2
IM3008D-2-120-0080	230v~	2×12	2×33.0	1+5/6+7-9+10	2×16.2	2
IM3008D-2-150-0080	230v~	2×15	2×27.0	1+5/6+7-9+10	2×20.4	2
IM3008D-2-180-0080	230v~	2×18	2×22.0	1+5/6+7-9+10	2×24.2	2
IM3008D-2-240-0080	230v~	2×24	2×17.0	1+5/6+7-9+10	2×32.1	2
IM3008S-1-060-0080	115v~	6	133.0	1+5/7+9	8.5	1
IM3008S-1-090-0080	115v~	9	89.0	1+5/7+9	12.5	1
IM3008S-1-120-0080	115v~	12	66.0	1+5/7+9	16.3	1
IM3008S-1-150-0080	115v~	15	53.0	1+5/7+9	20.2	1
IM3008S-1-180-0080	115v~	18	44.0	1+5/7+9	24.2	1
IM3008S-1-240-0080	115v~	24	33.0	1+5/7+9	32.2	1
IM3008D-1-060-0080	115v~	2×6	2×66.0	1+5/6+7-9+10	2×8.3	2
IM3008D-1-075-0080	115v~	2×7.5	2×53.0	1+5/6+7-9+10	2×10.5	2
IM3008D-1-090-0080	115v~	2×9	2×44.0	1+5/6+7-9+10	2×11.9	2
IM3008D-1-120-0080	115v~	2×12	2×33.0	1+5/6+7-9+10	2×16.2	2
IM3008D-1-150-0080	115v~	2×15	2×27.0	1+5/6+7-9+10	2×20.4	2
IM3008D-1-180-0080	115v~	2×18	2×22.0	1+5/6+7-9+10	2×24.2	2
IM3008D-1-240-0080	115v~	2×24	2×17.0	1+5/6+7-9+10	2×32.1	2
IM3008S-1*-060-0080	2*115v~	6	133.0	1+2-4+5/7+9	8.5	3
IM3008S-1*-090-0080	2*115v~	9	89.0	1+2-4+5/7+9	12.5	3
IM3008S-1*-120-0080	2*115v~	12	66.0	1+2-4+5/7+9	16.3	3
IM3008S-1*-150-0080	2*115v~	15	53.0	1+2-4+5/7+9	20.2	3
IM3008S-1*-180-0080	2*115v~	18	44.0	1+2-4+5/7+9	24.2	3
IM3008S-1*-240-0080	2*115v~	24	33.0	1+2-4+5/7+9	32.2	3
IM3008D-1*-060-0080	2*115v~	2×6	2×66.0	1+2-4+5/6+7-9+10	2×8.3	4
IM3008D-1*-090-0080	2*115v~	2×9	2×44.0	1+2-4+5/6+7-9+10	2×11.9	4
IM3008D-1*-120-0080	2*115v~	2×12	2×33.0	1+2-4+5/6+7-9+10	2×16.2	4
IM3008D-1*-150-0080	2*115v~	2×15	2×27.0	1+2-4+5/6+7-9+10	2×20.4	4
IM3008D-1*-180-0080	2*115v~	2×18	2×22.0	1+2-4+5/6+7-9+10	2×24.2	4
IM3008D-1*-240-0080	2*115v~	2×24	2×17.0	1+2-4+5/6+7-9+10	2×32.1	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI30/10.5 1.0VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 70 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3010S-2-060-0100	230v~	6	166.0	1+5/7+9	8.5	1
IM3010S-2-090-0100	230v~	9	111.0	1+5/7+9	12.5	1
IM3010S-2-120-0100	230v~	12	84.0	1+5/7+9	16.3	1
IM3010S-2-150-0100	230v~	15	66.0	1+5/7+9	20.2	1
IM3010S-2-180-0100	230v~	18	55.0	1+5/7+9	24.2	1
IM3010S-2-240-0100	230v~	24	42.0	1+5/7+9	32.2	1
IM3010D-2-060-0100	230v~	2×6	2×84.0	1+5/6+7-9+10	2×8.3	2
IM3010D-2-075-0100	230v~	2×7.5	2×66.6	1+5/6+7-9+10	2×10.5	2
IM3010D-2-090-0100	230v~	2×9	2×55.0	1+5/6+7-9+10	2×11.9	2
IM3010D-2-120-0100	230v~	2×12	2×42.0	1+5/6+7-9+10	2×16.2	2
IM3010D-2-150-0100	230v~	2×15	2×33.0	1+5/6+7-9+10	2×20.4	2
IM3010D-2-180-0100	230v~	2×18	2×28.0	1+5/6+7-9+10	2×24.2	2
IM3010D-2-240-0100	230v~	2×24	2×21.0	1+5/6+7-9+10	2×32.1	2
IM3010S-1-060-0100	115v~	6	166.0	1+5/7+9	8.5	1
IM3010S-1-090-0100	115v~	9	111.0	1+5/7+9	12.5	1
IM3010S-1-120-0100	115v~	12	84.0	1+5/7+9	16.3	1
IM3010S-1-150-0100	115v~	15	66.0	1+5/7+9	20.2	1
IM3010S-1-180-0100	115v~	18	55.0	1+5/7+9	24.2	1
IM3010S-1-240-0100	115v~	24	42.0	1+5/7+9	32.2	1
IM3010D-1-060-0100	115v~	2×6	2×84.0	1+5/6+7-9+10	2×8.3	2
IM3010D-1-075-0100	115v~	2×7.5	2×66.6	1+5/6+7-9+10	2×10.5	2
IM3010D-1-090-0100	115v~	2×9	2×55.0	1+5/6+7-9+10	2×11.9	2
IM3010D-1-120-0100	115v~	2×12	2×42.0	1+5/6+7-9+10	2×16.2	2
IM3010D-1-150-0100	115v~	2×15	2×33.0	1+5/6+7-9+10	2×20.4	2
IM3010D-1-180-0100	115v~	2×18	2×28.0	1+5/6+7-9+10	2×24.2	2
IM3010D-1-240-0100	115v~	2×24	2×21.0	1+5/6+7-9+10	2×32.1	2
IM3010S-1*-060-0100	2*115v~	6	166.0	1+2-4+5/7+9	8.5	3
IM3010S-1*-090-0100	2*115v~	9	111.0	1+2-4+5/7+9	12.5	3
IM3010S-1*-120-0100	2*115v~	12	84.0	1+2-4+5/7+9	16.3	3
IM3010S-1*-150-0100	2*115v~	15	66.0	1+2-4+5/7+9	20.2	3
IM3010S-1*-180-0100	2*115v~	18	55.0	1+2-4+5/7+9	24.2	3
IM3010S-1*-240-0100	2*115v~	24	42.0	1+2-4+5/7+9	32.2	3
IM3010D-1*-060-0100	2*115v~	2×6	2×84.0	1+2-4+5/6+7-9+10	2×8.3	4
IM3010D-1*-090-0100	2*115v~	2×9	2×55.0	1+2-4+5/6+7-9+10	2×11.9	4
IM3010D-1*-120-0100	2*115v~	2×12	2×42.0	1+2-4+5/6+7-9+10	2×16.2	4
IM3010D-1*-150-0100	2*115v~	2×15	2×33.0	1+2-4+5/6+7-9+10	2×20.4	4
IM3010D-1*-180-0100	2*115v~	2×18	2×28.0	1+2-4+5/6+7-9+10	2×24.2	4
IM3010D-1*-240-0100	2*115v~	2×24	2×21.0	1+2-4+5/6+7-9+10	2×32.1	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI30/12.5 1.5VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 85 grams


Accrding to:



Dimension in mm



BOTTOM VIEW



SIDE VIEW





Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3012S-2-060-0150	230v~	6	250.0	1+5/7+9	9.0	1
IM3012S-2-090-0150	230v~	9	166.0	1+5/7+9	13.8	1
IM3012S-2-120-0150	230v~	12	125.0	1+5/7+9	18.5	1
IM3012S-2-150-0150	230v~	15	100.0	1+5/7+9	23.0	1
IM3012S-2-180-0150	230v~	18	83.0	1+5/7+9	27.6	1
IM3012S-2-240-0150	230v~	24	62.0	1+5/7+9	35.8	1
IM3012D-2-060-0150	230v~	2× 6	2×125.0	1+5/6+7-9+10	2×9.3	2
IM3012D-2-075-0150	230v~	2× 7.5	2×100.0	1+5/6+7-9+10	2×11.6	2
IM3012D-2-090-0150	230v~	2× 9	2×83.0	1+5/6+7-9+10	2×13.8	2
IM3012D-2-120-0150	230v~	2×12	2×62.5	1+5/6+7-9+10	2×18.5	2
IM3012D-2-150-0150	230v~	2×15	2×50.0	1+5/6+7-9+10	2×23.2	2
IM3012D-2-180-0150	230v~	2×18	2×41.6	1+5/6+7-9+10	2×28.0	2
IM3012D-2-240-0150	230v~	2×24	2×31.2	1+5/6+7-9+10	2×37.0	2
IM3012S-1-060-0150	115v~	6	250.0	1+5/7+9	9.0	1
IM3012S-1-090-0150	115v~	9	166.0	1+5/7+9	13.8	1
IM3012S-1-120-0150	115v~	12	125.0	1+5/7+9	18.5	1
IM3012S-1-150-0150	115v~	15	100.0	1+5/7+9	23.0	1
IM3012S-1-180-0150	115v~	18	83.0	1+5/7+9	27.6	1
IM3012S-1-240-0150	115v~	24	62.0	1+5/7+9	35.8	1
IM3012D-1-060-0150	115v~	2× 6	2×125.0	1+5/6+7-9+10	2×9.3	2
IM3012D-1-075-0150	115v~	2× 7.5	2×100.0	1+5/6+7-9+10	2×11.6	2
IM3012D-1-090-0150	115v~	2× 9	2×83.0	1+5/6+7-9+10	2×13.8	2
IM3012D-1-120-0150	115v~	2×12	2×62.5	1+5/6+7-9+10	2×18.5	2
IM3012D-1-150-0150	115v~	2×15	2×50.0	1+5/6+7-9+10	2×23.2	2
IM3012D-1-180-0150	115v~	2×18	2×41.6	1+5/6+7-9+10	2×28.0	2
IM3012D-1-240-0150	115v~	2×24	2×31.2	1+5/6+7-9+10	2×37.0	2
IM3012S-1*-060-0150	2*115v~	6	250.0	1+2-4+5/7+9	9.0	3
IM3012S-1*-090-0150	2*115v~	9	166.0	1+2-4+5/7+9	13.8	3
IM3012S-1*-120-0150	2*115v~	12	125.0	1+2-4+5/7+9	18.5	3
IM3012S-1*-150-0150	2*115v~	15	100.0	1+2-4+5/7+9	23.0	3
IM3012S-1*-180-0150	2*115v~	18	83.0	1+2-4+5/7+9	27.6	3
IM3012S-1*-240-0150	2*115v~	24	62.5	1+2-4+5/7+9	35.8	3
IM3012D-1*-060-0150	2*115v~	2× 6	2×125.0	1+2-4+5/6+7-9+10	2×9.3	4
IM3012D-1*-090-0150	2*115v~	2× 9	2×83.0	1+2-4+5/6+7-9+10	2×13.8	4
IM3012D-1*-120-0150	2*115v~	2×12	2×62.5	1+2-4+5/6+7-9+10	2×18.5	4
IM3012D-1*-150-0150	2*115v~	2×15	2×50.0	1+2-4+5/6+7-9+10	2×23.2	4
IM3012D-1*-180-0150	2*115v~	2×18	2×41.6	1+2-4+5/6+7-9+10	2×28.0	4
IM3012D-1*-240-0150	2*115v~	2×24	2×31.2	1+2-4+5/6+7-9+10	2×37.0	4

No. 1

No. 2

No. 3

No. 4




Type

Power


EI30/15.5 2.0VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 100 grams


Accrding to:



Dimension in mm




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3015S-2-060-0200	230v~	6	333.0	1+5/7+9	10.5	1
IM3015S-2-090-0200	230v~	9	222.0	1+5/7+9	15.0	1
IM3015S-2-120-0200	230v~	12	166.0	1+5/7+9	20.0	1
IM3015S-2-150-0200	230v~	15	133.0	1+5/7+9	26.0	1
IM3015S-2-180-0200	230v~	18	111.0	1+5/7+9	30.0	1
IM3015S-2-240-0200	230v~	24	83.0	1+5/7+9	38.0	1
IM3015D-2-060-0200	230v~	2× 6	2×166.0	1+5/6+7-9+10	2×10.5	2
IM3015D-2-075-0200	230v~	2× 7.5	2×133.0	1+5/6+7-9+10	2×13.0	2
IM3015D-2-090-0200	230v~	2× 9	2×111.0	1+5/6+7-9+10	2×15.0	2
IM3015D-2-120-0200	230v~	2×12	2×83.0	1+5/6+7-9+10	2×20.0	2
IM3015D-2-150-0200	230v~	2×15	2×66.0	1+5/6+7-9+10	2×24.5	2
IM3015D-2-180-0200	230v~	2×18	2×55.0	1+5/6+7-9+10	2×29.5	2
IM3015D-2-240-0200	230v~	2×24	2×42.0	1+5/6+7-9+10	2×36.5	2
IM3015S-1-060-0200	115v~	6	333.0	1+5/7+9	10.5	1
IM3015S-1-090-0200	115v~	9	222.0	1+5/7+9	15.0	1
IM3015S-1-120-0200	115v~	12	166.0	1+5/7+9	20.0	1
IM3015S-1-150-0200	115v~	15	133.0	1+5/7+9	26.0	1
IM3015S-1-180-0200	115v~	18	111.0	1+5/7+9	30.0	1
IM3015S-1-240-0200	115v~	24	83.0	1+5/7+9	38.0	1
IM3015D-1-060-0200	115v~	2× 6	2×166.0	1+5/6+7-9+10	2×10.5	2
IM3015D-1-075-0200	115v~	2× 7.5	2×133.0	1+5/6+7-9+10	2×13.0	2
IM3015D-1-090-0200	115v~	2× 9	2×111.0	1+5/6+7-9+10	2×15.0	2
IM3015D-1-120-0200	115v~	2×12	2×83.0	1+5/6+7-9+10	2×20.0	2
IM3015D-1-150-0200	115v~	2×15	2×66.0	1+5/6+7-9+10	2×24.5	2
IM3015D-1-180-0200	115v~	2×18	2×55.0	1+5/6+7-9+10	2×29.5	2
IM3015D-1-240-0200	115v~	2×24	2×42.0	1+5/6+7-9+10	2×36.5	2
IM3015S-1*-060-0200	2*115v~	6	333.0	1+2-4+5/7+9	10.5	3
IM3015S-1*-090-0200	2*115v~	9	222.0	1+2-4+5/7+9	15.0	3
IM3015S-1*-120-0200	2*115v~	12	166.0	1+2-4+5/7+9	20.0	3
IM3015S-1*-150-0200	2*115v~	15	133.0	1+2-4+5/7+9	26.0	3
IM3015S-1*-180-0200	2*115v~	18	111.0	1+2-4+5/7+9	30.0	3
IM3015S-1*-240-0200	2*115v~	24	83.0	1+2-4+5/7+9	38.0	3
IM3015D-1*-060-0200	2*115v~	2× 6	2×166.0	1+2-4+5/6+7-9+10	2×10.5	4
IM3015D-1*-090-0200	2*115v~	2× 9	2×111.0	1+2-4+5/6+7-9+10	2×15.0	4
IM3015D-1*-120-0200	2*115v~	2×12	2×83.0	1+2-4+5/6+7-9+10	2×20.0	4
IM3015D-1*-150-0200	2*115v~	2×15	2×66.0	1+2-4+5/6+7-9+10	2×24.5	4
IM3015D-1*-180-0200	2*115v~	2×18	2×55.0	1+2-4+5/6+7-9+10	2×29.5	4
IM3015D-1*-240-0200	2*115v~	2×24	2×42.0	1+2-4+5/6+7-9+10	2×36.5	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI30/18 2.3VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 110 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3018S-2-060-0230	230v~	6	384.0	1+5/7+9	10.0	1
IM3018S-2-090-0230	230v~	9	256.0	1+5/7+9	14.0	1
IM3018S-2-120-0230	230v~	12	192.0	1+5/7+9	19.0	1
IM3018S-2-150-0230	230v~	15	154.0	1+5/7+9	24.0	1
IM3018S-2-180-0230	230v~	18	128.0	1+5/7+9	28.0	1
IM3018S-2-240-0230	230v~	24	96.0	1+5/7+9	35.0	1
IM3018D-2-060-0230	230v~	2× 6	2×192.0	1+5/6+7-9+10	2×10.0	2
IM3018D-2-075-0230	230v~	2× 7.5	2×153.0	1+5/6+7-9+10	2×13.0	2
IM3018D-2-090-0230	230v~	2× 9	2×128.0	1+5/6+7-9+10	2×14.0	2
IM3018D-2-120-0230	230v~	2×12	2×96.0	1+5/6+7-9+10	2×18.0	2
IM3018D-2-150-0230	230v~	2×15	2×77.0	1+5/6+7-9+10	2×24.5	2
IM3018D-2-180-0230	230v~	2×18	2×64.0	1+5/6+7-9+10	2×29.0	2
IM3018D-2-240-0230	230v~	2×24	2×48.0	1+5/6+7-9+10	2×35.8	2
IM3018S-1-060-0230	115v~	6	384.0	1+5/7+9	10.0	1
IM3018S-1-090-0230	115v~	9	256.0	1+5/7+9	14.0	1
IM3018S-1-120-0230	115v~	12	192.0	1+5/7+9	19.0	1
IM3018S-1-150-0230	115v~	15	154.0	1+5/7+9	24.0	1
IM3018S-1-180-0230	115v~	18	128.0	1+5/7+9	28.0	1
IM3018S-1-240-0230	115v~	24	96.0	1+5/7+9	35.0	1
IM3018D-1-060-0230	115v~	2× 6	2×192.0	1+5/6+7-9+10	2×10.0	2
IM3018D-1-075-0230	115v~	2× 7.5	2×153.0	1+5/6+7-9+10	2×13.0	2
IM3018D-1-090-0230	115v~	2× 9	2×128.0	1+5/6+7-9+10	2×14.0	2
IM3018D-1-120-0230	115v~	2×12	2×96.0	1+5/6+7-9+10	2×18.0	2
IM3018D-1-150-0230	115v~	2×15	2×77.0	1+5/6+7-9+10	2×24.5	2
IM3018D-1-180-0230	115v~	2×18	2×64.0	1+5/6+7-9+10	2×29.0	2
IM3018D-1-240-0230	115v~	2×24	2×48.0	1+5/6+7-9+10	2×35.8	2
IM3018S-1*-060-0230	2*115v~	6	384.0	1+2-4+5/7+9	10.0	3
IM3018S-1*-090-0230	2*115v~	9	256.0	1+2-4+5/7+9	14.0	3
IM3018S-1*-120-0230	2*115v~	12	192.0	1+2-4+5/7+9	19.0	3
IM3018S-1*-150-0230	2*115v~	15	154.0	1+2-4+5/7+9	24.0	3
IM3018S-1*-180-0230	2*115v~	18	128.0	1+2-4+5/7+9	28.0	3
IM3018S-1*-240-0230	2*115v~	24	96.0	1+2-4+5/7+9	35.0	3
IM3018D-1*-060-0230	2*115v~	2× 6	2×192.0	1+2-4+5/6+7-9+10	2×10.0	4
IM3018D-1*-090-0230	2*115v~	2× 9	2×128.0	1+2-4+5/6+7-9+10	2×14.0	4
IM3018D-1*-120-0230	2*115v~	2×12	2×96.0	1+2-4+5/6+7-9+10	2×18.0	4
IM3018D-1*-150-0230	2*115v~	2×15	2×77.0	1+2-4+5/6+7-9+10	2×24.5	4
IM3018D-1*-180-0230	2*115v~	2×18	2×64.0	1+2-4+5/6+7-9+10	2×29.0	4
IM3018D-1*-240-0230	2*115v~	2×24	2×48.0	1+2-4+5/6+7-9+10	2×35.8	4


No. 1




No. 2



No. 3



No. 4




Type

Power


EI30/23 2.8VA

- Safety transformer/Short-circuit-proof
- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 140 grams


Accrding to:



Dimension in mm:




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3023S-2-060-0280	230v~	6	466.0	1+5/7+9	10.7	1
IM3023S-2-090-0280	230v~	9	311.0	1+5/7+9	14.8	1
IM3023S-2-120-0280	230v~	12	233.0	1+5/7+9	20.8	1
IM3023S-2-150-0280	230v~	15	186.0	1+5/7+9	24.0	1
IM3023S-2-180-0280	230v~	18	155.0	1+5/7+9	30.0	1
IM3023S-2-240-0280	230v~	24	116.0	1+5/7+9	38.5	1
IM3023D-2-060-0280	230v~	2× 6	2×233.0	1+5/6+7-9+10	2×10.7	2
IM3023D-2-075-0280	230v~	2× 7.5	2×187.0	1+5/6+7-9+10	2×13.0	2
IM3023D-2-090-0280	230v~	2× 9	2×155.0	1+5/6+7-9+10	2×16.0	2
IM3023D-2-120-0280	230v~	2×12	2×116.0	1+5/6+7-9+10	2×20.4	2
IM3023D-2-150-0280	230v~	2×15	2×93.0	1+5/6+7-9+10	2×25.0	2
IM3023D-2-180-0280	230v~	2×18	2×77.0	1+5/6+7-9+10	2×30.5	2
IM3023D-2-240-0280	230v~	2×24	2×58.0	1+5/6+7-9+10	2×38.7	2
IM3023S-1-060-0280	115v~	6	466.0	1+5/7+9	10.7	1
IM3023S-1-090-0280	115v~	9	311.0	1+5/7+9	14.8	1
IM3023S-1-120-0280	115v~	12	233.0	1+5/7+9	20.8	1
IM3023S-1-150-0280	115v~	15	186.0	1+5/7+9	24.0	1
IM3023S-1-180-0280	115v~	18	155.0	1+5/7+9	30.0	1
IM3023S-1-240-0280	115v~	24	116.0	1+5/7+9	38.5	1
IM3023D-1-060-0280	115v~	2× 6	2×233.0	1+5/6+7-9+10	2×10.7	2
IM3023D-1-075-0280	115v~	2× 7.5	2×187.0	1+5/6+7-9+10	2×13.0	2
IM3023D-1-090-0280	115v~	2× 9	2×155.0	1+5/6+7-9+10	2×16.0	2
IM3023D-1-120-0280	115v~	2×12	2×116.0	1+5/6+7-9+10	2×20.4	2
IM3023D-1-150-0280	115v~	2×15	2×93.0	1+5/6+7-9+10	2×25.0	2
IM3023D-1-180-0280	115v~	2×18	2×77.0	1+5/6+7-9+10	2×30.5	2
IM3023D-1-240-0280	115v~	2×24	2×58.0	1+5/6+7-9+10	2×38.7	2
IM3023S-1*-060-0280	2*115v~	6	466.0	1+2-4+5/7+9	10.7	3
IM3023S-1*-090-0280	2*115v~	9	311.0	1+2-4+5/7+9	14.8	3
IM3023S-1*-120-0280	2*115v~	12	233.0	1+2-4+5/7+9	20.8	3
IM3023S-1*-150-0280	2*115v~	15	186.0	1+2-4+5/7+9	24.0	3
IM3023S-1*-180-0280	2*115v~	18	155.0	1+2-4+5/7+9	30.0	3
IM3023S-1*-240-0280	2*115v~	24	116.0	1+2-4+5/7+9	38.5	3
IM3023D-1*-060-0280	2*115v~	2× 6	2×233.0	1+2-4+5/6+7-9+10	2×10.7	4
IM3023D-1*-090-0280	2*115v~	2× 9	2×155.0	1+2-4+5/6+7-9+10	2×16.0	4
IM3023D-1*-120-0280	2*115v~	2×12	2×116.0	1+2-4+5/6+7-9+10	2×20.4	4
IM3023D-1*-150-0280	2*115v~	2×15	2×93.0	1+2-4+5/6+7-9+10	2×25.0	4
IM3023D-1*-180-0280	2*115v~	2×18	2×77.0	1+2-4+5/6+7-9+10	2×30.5	4
IM3023D-1*-240-0280	2*115v~	2×24	2×58.0	1+2-4+5/6+7-9+10	2×38.7	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI35/15 3.5VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 155 grams


According to:



Dimension in mm:




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3515S-2-060-0350	230v~	6	583.0	1+5/7+9	7.6	1
IM3515S-2-090-0350	230v~	9	388.0	1+5/7+9	11.5	1
IM3515S-2-120-0350	230v~	12	291.0	1+5/7+9	15.5	1
IM3515S-2-150-0350	230v~	15	233.0	1+5/7+9	19.0	1
IM3515S-2-180-0350	230v~	18	194.0	1+5/7+9	22.8	1
IM3515S-2-240-0350	230v~	24	145.0	1+5/7+9	30.0	1
IM3515D-2-060-0350	230v~	2×6	2×291.0	1+5/6+7-9+10	2×8.0	2
IM3515D-2-075-0350	230v~	2×7.5	2×233.0	1+5/6+7-9+10	2×10.0	2
IM3515D-2-090-0350	230v~	2×9	2×194.0	1+5/6+7-9+10	2×11.5	2
IM3515D-2-120-0350	230v~	2×12	2×145.0	1+5/6+7-9+10	2×15.5	2
IM3515D-2-150-0350	230v~	2×15	2×116.0	1+5/6+7-9+10	2×19.0	2
IM3515D-2-180-0350	230v~	2×18	2×97.0	1+5/6+7-9+10	2×22.8	2
IM3515D-2-240-0350	230v~	2×24	2×73.0	1+5/6+7-9+10	2×30.0	2
IM3515S-1-060-0350	115v~	6	583.0	1+5/7+9	7.6	1
IM3515S-1-090-0350	115v~	9	388.0	1+5/7+9	11.5	1
IM3515S-1-120-0350	115v~	12	291.0	1+5/7+9	15.5	1
IM3515S-1-150-0350	115v~	15	233.0	1+5/7+9	19.0	1
IM3515S-1-180-0350	115v~	18	194.0	1+5/7+9	22.8	1
IM3515S-1-240-0350	115v~	24	145.0	1+5/7+9	30.0	1
IM3515D-1-060-0350	115v~	2×6	2×291.0	1+5/6+7-9+10	2×8.0	2
IM3515D-1-075-0350	115v~	2×7.5	2×233.0	1+5/6+7-9+10	2×10.0	2
IM3515D-1-090-0350	115v~	2×9	2×194.0	1+5/6+7-9+10	2×11.5	2
IM3515D-1-120-0350	115v~	2×12	2×145.0	1+5/6+7-9+10	2×15.5	2
IM3515D-1-150-0350	115v~	2×15	2×116.0	1+5/6+7-9+10	2×19.0	2
IM3515D-1-180-0350	115v~	2×18	2×97.0	1+5/6+7-9+10	2×22.8	2
IM3515D-1-240-0350	115v~	2×24	2×73.0	1+5/6+7-9+10	2×30.0	2
IM3515S-1*-060-0350	2*115v~	6	583.0	1+2-4+5/7+9	7.6	3
IM3515S-1*-090-0350	2*115v~	9	388.0	1+2-4+5/7+9	11.5	3
IM3515S-1*-120-0350	2*115v~	12	291.0	1+2-4+5/7+9	15.5	3
IM3515S-1*-150-0350	2*115v~	15	233.0	1+2-4+5/7+9	19.0	3
IM3515S-1*-180-0350	2*115v~	18	194.0	1+2-4+5/7+9	22.8	3
IM3515S-1*-240-0350	2*115v~	24	145.0	1+2-4+5/7+9	30.0	3
IM3515D-1*-060-0350	2*115v~	2×6	2×291.0	1+2-4+5/6+7-9+10	2×8.0	4
IM3515D-1*-090-0350	2*115v~	2×9	2×194.0	1+2-4+5/6+7-9+10	2×11.5	4
IM3515D-1*-120-0350	2*115v~	2×12	2×145.0	1+2-4+5/6+7-9+10	2×15.5	4
IM3515D-1*-150-0350	2*115v~	2×15	2×116.0	1+2-4+5/6+7-9+10	2×19.0	4
IM3515D-1*-180-0350	2*115v~	2×18	2×97.0	1+2-4+5/6+7-9+10	2×22.8	4
IM3515D-1*-240-0350	2*115v~	2×24	2×73.0	1+2-4+5/6+7-9+10	2×30.0	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI35/18 4.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70 °C/B
- Dielectric Strength 4500Vrms
- Weight: 155 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3518S-2-060-0350	230v~	6	583.0	1+5/7+9	7.6	1
IM3518S-2-090-0350	230v~	9	388.0	1+5/7+9	11.5	1
IM3518S-2-120-0350	230v~	12	291.0	1+5/7+9	15.5	1
IM3518S-2-150-0350	230v~	15	233.0	1+5/7+9	19.0	1
IM3518S-2-180-0350	230v~	18	194.0	1+5/7+9	22.8	1
IM3518S-2-240-0350	230v~	24	145.0	1+5/7+9	30.0	1
IM3518D-2-060-0350	230v~	2× 6	2×291.0	1+5/6+7-9+10	2×8.0	2
IM3518D-2-075-0350	230v~	2× 7.5	2×233.0	1+5/6+7-9+10	2×10.0	2
IM3518D-2-090-0350	230v~	2× 9	2×194.0	1+5/6+7-9+10	2×11.5	2
IM3518D-2-120-0350	230v~	2×12	2×145.0	1+5/6+7-9+10	2×15.5	2
IM3518D-2-150-0350	230v~	2×15	2×116.0	1+5/6+7-9+10	2×19.0	2
IM3518D-2-180-0350	230v~	2×18	2×97.0	1+5/6+7-9+10	2×22.8	2
IM3518D-2-240-0350	230v~	2×24	2×73.0	1+5/6+7-9+10	2×30.0	2
IM3518S-1-060-0350	115v~	6	583.0	1+5/7+9	7.6	1
IM3518S-1-090-0350	115v~	9	388.0	1+5/7+9	11.5	1
IM3518S-1-120-0350	115v~	12	291.0	1+5/7+9	15.5	1
IM3518S-1-150-0350	115v~	15	233.0	1+5/7+9	19.0	1
IM3518S-1-180-0350	115v~	18	194.0	1+5/7+9	22.8	1
IM3518S-1-240-0350	115v~	24	145.0	1+5/7+9	30.0	1
IM3518D-1-060-0350	115v~	2× 6	2×291.0	1+5/6+7-9+10	2×8.0	2
IM3518D-1-075-0350	115v~	2× 7.5	2×233.0	1+5/6+7-9+10	2×10.0	2
IM3518D-1-090-0350	115v~	2× 9	2×194.0	1+5/6+7-9+10	2×11.5	2
IM3518D-1-120-0350	115v~	2×12	2×145.0	1+5/6+7-9+10	2×15.5	2
IM3518D-1-150-0350	115v~	2×15	2×116.0	1+5/6+7-9+10	2×19.0	2
IM3518D-1-180-0350	115v~	2×18	2×97.0	1+5/6+7-9+10	2×22.8	2
IM3518D-1-240-0350	115v~	2×24	2×73.0	1+5/6+7-9+10	2×30.0	2
IM3518S-1*-060-0350	2*115v~	6	583.0	1+2-4+5/7+9	7.6	3
IM3518S-1*-090-0350	2*115v~	9	388.0	1+2-4+5/7+9	11.5	3
IM3518S-1*-120-0350	2*115v~	12	291.0	1+2-4+5/7+9	15.5	3
IM3518S-1*-150-0350	2*115v~	15	233.0	1+2-4+5/7+9	19.0	3
IM3518S-1*-180-0350	2*115v~	18	194.0	1+2-4+5/7+9	22.8	3
IM3518S-1*-240-0350	2*115v~	24	145.0	1+2-4+5/7+9	30.0	3
IM3518D-1*-060-0350	2*115v~	2× 6	2×291.0	1+2-4+5/6+7-9+10	2×8.0	4
IM3518D-1*-090-0350	2*115v~	2× 9	2×194.0	1+2-4+5/6+7-9+10	2×11.5	4
IM3518D-1*-120-0350	2*115v~	2×12	2×145.0	1+2-4+5/6+7-9+10	2×15.5	4
IM3518D-1*-150-0350	2*115v~	2×15	2×116.0	1+2-4+5/6+7-9+10	2×19.0	4
IM3518D-1*-180-0350	2*115v~	2×18	2×97.0	1+2-4+5/6+7-9+10	2×22.8	4
IM3518D-1*-240-0350	2*115v~	2×24	2×73.0	1+2-4+5/6+7-9+10	2×30.0	4


No. 1




No. 2



No. 3



No. 4



Type A

Power


EI38/13.6 3.2VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70 °C/B
- Dielectric Strength 4500Vrms
- Weight: 150 grams


According to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3813S-2-060-0320	230v~	6	534.0	1+5/7+9	8.2	1
IM3813S-2-090-0320	230v~	9	356.0	1+5/7+9	12.5	1
IM3813S-2-120-0320	230v~	12	267.0	1+5/7+9	16.5	1
IM3813S-2-150-0320	230v~	15	214.0	1+5/7+9	21.5	1
IM3813S-2-180-0320	230v~	18	178.0	1+5/7+9	26.0	1
IM3813S-2-240-0320	230v~	24	134.0	1+5/7+9	33.0	1
IM3813D-2-060-0320	230v~	2× 6	2×267.0	1+5/6+7-9+10	2×8.2	2
IM3813D-2-075-0320	230v~	2× 7.5	2×214.0	1+5/6+7-9+10	2×10.5	2
IM3813S-2-090-0320	230v~	2× 9	2×178.0	1+5/6+7-9+10	2×12.5	2
IM3813S-2-120-0320	230v~	2×12	2×134.0	1+5/6+7-9+10	2×16.5	2
IM3813S-2-150-0320	230v~	2×15	2×107.0	1+5/6+7-9+10	2×21.5	2
IM3813S-2-180-0320	230v~	2×18	2×89.0	1+5/6+7-9+10	2×26.0	2
IM3813S-2-240-0320	230v~	2×24	2×67.0	1+5/6+7-9+10	2×33.0	2
IM3813S-1-060-0320	115v~	6	534.0	1+5/7+9	8.2	1
IM3813S-1-090-0320	115v~	9	356.0	1+5/7+9	12.5	1
IM3813S-1-120-0320	115v~	12	267.0	1+5/7+9	16.5	1
IM3813S-1-150-0320	115v~	15	214.0	1+5/7+9	21.5	1
IM3813S-1-180-0320	115v~	18	178.0	1+5/7+9	26.0	1
IM3813S-1-240-0320	115v~	24	134.0	1+5/7+9	33.0	1
IM3813D-1-060-0320	115v~	2× 6	2×267.0	1+5/6+7-9+10	2×8.2	2
IM3813D-1-075-0320	115v~	2× 7.5	2×214.0	1+5/6+7-9+10	2×10.5	2
IM3813S-1-090-0320	115v~	2× 9	2×178.0	1+5/6+7-9+10	2×12.5	2
IM3813S-1-120-0320	115v~	2×12	2×134.0	1+5/6+7-9+10	2×16.5	2
IM3813S-1-150-0320	115v~	2×15	2×107.0	1+5/6+7-9+10	2×21.5	2
IM3813S-1-180-0320	115v~	2×18	2×89.0	1+5/6+7-9+10	2×26.0	2
IM3813S-1-240-0320	115v~	2×24	2×67.0	1+5/6+7-9+10	2×33.0	2
IM3813S-1*-060-0320	2*115v~	6	534.0	1+2-4+5/7+9	8.2	3
IM3813S-1*-090-0320	2*115v~	9	356.0	1+2-4+5/7+9	12.5	3
IM3813S-1*-120-0320	2*115v~	12	267.0	1+2-4+5/7+9	16.5	3
IM3813S-1*-150-0320	2*115v~	15	214.0	1+2-4+5/7+9	21.5	3
IM3813S-1*-180-0320	2*115v~	18	178.0	1+2-4+5/7+9	26.0	3
IM3813S-1*-240-0320	2*115v~	24	134.0	1+2-4+5/7+9	33.0	3
IM3813D-1*-060-0320	2*115v~	2× 6	2×267.0	1+2-4+5/6+7-9+10	2×8.2	4
IM3813D-1*-090-0320	2*115v~	2× 9	2×178.0	1+2-4+5/6+7-9+10	2×12.5	4
IM3813D-1*-120-0320	2*115v~	2×12	2×134.0	1+2-4+5/6+7-9+10	2×16.5	4
IM3813D-1*-150-0320	2*115v~	2×15	2×107.0	1+2-4+5/6+7-9+10	2×21.5	4
IM3813D-1*-180-0320	2*115v~	2×18	2×89.0	1+2-4+5/6+7-9+10	2×26.0	4
IM3813D-1*-240-0320	2*115v~	2×24	2×67.0	1+2-4+5/6+7-9+10	2×33.0	4


No. 1




No. 2



No. 3



No. 4



Type B

Power


EI38/13.6 4.5VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 40 °C/B
- Dielectric Strength 4500Vrms
- Weight: 150 grams


Accrding to:



Dimension in mm :






BOTTOM VIEW



SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM3813S-2-060-0450	230v~	6	750.0	1+5/7+9	9.3	1
IM3813S-2-090-0450	230v~	9	500.0	1+5/7+9	12.7	1
IM3813S-2-120-0450	230v~	12	375.0	1+5/7+9	17.4	1
IM3813S-2-150-0450	230v~	15	300.0	1+5/7+9	20.9	1
IM3813S-2-180-0450	230v~	18	250.0	1+5/7+9	24.2	1
IM3813S-2-240-0450	230v~	24	187.0	1+5/7+9	32.6	1
IM3813D-2-060-0450	230v~	2× 6	2×375.0	1+5/6+7-9+10	2×9.3	2
IM3813D-2-075-0450	230v~	2× 7.5	2×300.0	1+5/6+7-9+10	2×10.9	2
IM3813S-2-090-0450	230v~	2× 9	2×250.0	1+5/6+7-9+10	2×13.0	2
IM3813S-2-120-0450	230v~	2×12	2×187.0	1+5/6+7-9+10	2×17.9	2
IM3813S-2-150-0450	230v~	2×15	2×150.0	1+5/6+7-9+10	2×19.7	2
IM3813S-2-180-0450	230v~	2×18	2×125.0	1+5/6+7-9+10	2×21.5	2
IM3813S-2-240-0450	230v~	2×24	2×94.0	1+5/6+7-9+10	2×32.5	2
IM3813S-1-060-0450	115v~	6	750.0	1+5/7+9	9.3	1
IM3813S-1-090-0450	115v~	9	500.0	1+5/7+9	12.7	1
IM3813S-1-120-0450	115v~	12	375.0	1+5/7+9	17.4	1
IM3813S-1-150-0450	115v~	15	300.0	1+5/7+9	20.9	1
IM3813S-1-180-0450	115v~	18	250.0	1+5/7+9	24.2	1
IM3813S-1-240-0450	115v~	24	187.0	1+5/7+9	32.6	1
IM3813D-1-060-0450	115v~	2× 6	2×375.0	1+5/6+7-9+10	2×9.3	2
IM3813D-1-075-0450	115v~	2× 7.5	2×300.0	1+5/6+7-9+10	2×10.9	2
IM3813S-1-090-0450	115v~	2× 9	2×250.0	1+5/6+7-9+10	2×13.0	2
IM3813S-1-120-0450	115v~	2×12	2×187.0	1+5/6+7-9+10	2×17.9	2
IM3813S-1-150-0450	115v~	2×15	2×150.0	1+5/6+7-9+10	2×19.7	2
IM3813S-1-180-0450	115v~	2×18	2×125.0	1+5/6+7-9+10	2×21.5	2
IM3813S-1-240-0450	115v~	2×24	2×94.0	1+5/6+7-9+10	2×32.5	2
IM3813S-1*-060-0450	2*115v~	6	750.0	1+2-4+5/7+9	9.3	3
IM3813S-1*-090-0450	2*115v~	9	500.0	1+2-4+5/7+9	12.7	3
IM3813S-1*-120-0450	2*115v~	12	375.0	1+2-4+5/7+9	17.4	3
IM3813S-1*-150-0450	2*115v~	15	300.0	1+2-4+5/7+9	20.9	3
IM3813S-1*-180-0450	2*115v~	18	250.0	1+2-4+5/7+9	24.2	3
IM3813S-1*-240-0450	2*115v~	24	187.0	1+2-4+5/7+9	32.6	3
IM3813D-1*-060-0450	2*115v~	2× 6	2×375.0	1+2-4+5/6+7-9+10	2×9.3	4
IM3813D-1*-090-0450	2*115v~	2× 9	2×250.0	1+2-4+5/6+7-9+10	2×13.0	4
IM3813D-1*-120-0450	2*115v~	2×12	2×187.0	1+2-4+5/6+7-9+10	2×17.9	4
IM3813D-1*-150-0450	2*115v~	2×15	2×150.0	1+2-4+5/6+7-9+10	2×19.7	4
IM3813D-1*-180-0450	2*115v~	2×18	2×125.0	1+2-4+5/6+7-9+10	2×21.5	4
IM3813D-1*-240-0450	2*115v~	2×24	2×94.0	1+2-4+5/6+7-9+10	2×32.5	4

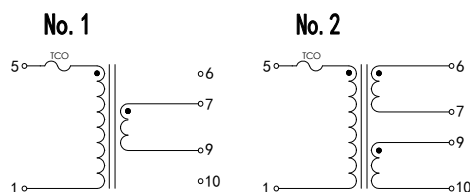

Type A

Power


EI42/14.8 5.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 200 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM4214S-2-060-0500	230v~	6	834.0	1+6/8+11	8.0	1
IM4214S-2-090-0500	230v~	9	556.0	1+6/8+11	12.0	1
IM4214S-2-120-0500	230v~	12	417.0	1+6/8+11	15.5	1
IM4214S-2-150-0500	230v~	15	334.0	1+6/8+11	19.5	1
IM4214S-2-180-0500	230v~	18	278.0	1+6/8+11	23.5	1
IM4214S-2-240-0500	230v~	24	208.0	1+6/8+11	31.0	1
IM4214D-2-060-0500	230v~	2× 6	2×417.0	1+6/7+8-11+12	2×7.8	2
IM4214D-2-075-0500	230v~	2× 7.5	2×334.0	1+6/7+8-11+12	2×9.8	2
IM4214D-2-090-0500	230v~	2× 9	2×278.0	1+6/7+8-11+12	2×11.8	2
IM4214D-2-120-0500	230v~	2×12	2×208.0	1+6/7+8-11+12	2×15.5	2
IM4214D-2-150-0500	230v~	2×15	2×167.0	1+6/7+8-11+12	2×19.5	2
IM4214D-2-180-0500	230v~	2×18	2×139.0	1+6/7+8-11+12	2×23.5	2
IM4214D-2-240-0500	230v~	2×24	2×104.0	1+6/7+8-11+12	2×31.0	2
IM4214S-1-060-0500	115v~	6	834.0	1+6/8+11	8.0	1
IM4214S-1-090-0500	115v~	9	556.0	1+6/8+11	12.0	1
IM4214S-1-120-0500	115v~	12	417.0	1+6/8+11	15.5	1
IM4214S-1-150-0500	115v~	15	334.0	1+6/8+11	19.5	1
IM4214S-1-180-0500	115v~	18	278.0	1+6/8+11	23.5	1
IM4214S-1-240-0500	115v~	24	208.0	1+6/8+11	31.0	1
IM4214D-1-060-0500	115v~	2× 6	2×417.0	1+6/7+8-11+12	2×7.8	2
IM4214D-1-075-0500	115v~	2× 7.5	2×334.0	1+6/7+8-11+12	2×9.8	2
IM4214D-1-090-0500	115v~	2× 9	2×278.0	1+6/7+8-11+12	2×11.8	2
IM4214D-1-120-0500	115v~	2×12	2×208.0	1+6/7+8-11+12	2×15.5	2
IM4214D-1-150-0500	115v~	2×15	2×167.0	1+6/7+8-11+12	2×19.5	2
IM4214D-1-180-0500	115v~	2×18	2×139.0	1+6/7+8-11+12	2×23.5	2
IM4214D-1-240-0500	115v~	2×24	2×104.0	1+6/7+8-11+12	2×31.0	2
IM4214S-1*-060-0500	2*115v~	6	834.0	1+3-4+6/8+11	8.0	3
IM4214S-1*-090-0500	2*115v~	9	556.0	1+3-4+6/8+11	12.0	3
IM4214S-1*-120-0500	2*115v~	12	417.0	1+3-4+6/8+11	15.5	3
IM4214S-1*-150-0500	2*115v~	15	334.0	1+3-4+6/8+11	19.5	3
IM4214S-1*-180-0500	2*115v~	18	278.0	1+3-4+6/8+11	23.5	3
IM4214S-1*-240-0500	2*115v~	24	208.0	1+3-4+6/8+11	31.0	3
IM4214D-1*-060-0500	2*115v~	2× 6	2×417.0	1+3-4+6/7+8-11+12	2×7.8	4
IM4214D-1*-090-0500	2*115v~	2× 9	2×278.0	1+3-4+6/7+8-11+12	2×11.8	4
IM4214D-1*-120-0500	2*115v~	2×12	2×208.0	1+3-4+6/7+8-11+12	2×15.5	4
IM4214D-1*-150-0500	2*115v~	2×15	2×167.0	1+3-4+6/7+8-11+12	2×19.5	4
IM4214D-1*-180-0500	2*115v~	2×18	2×139.0	1+3-4+6/7+8-11+12	2×23.5	4
IM4214D-1*-240-0500	2*115v~	2×24	2×104.0	1+3-4+6/7+8-11+12	2×31.0	4


No. 1




No. 2



No. 3



No. 4



Type B

Power


EI42/14.8 5.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70 °C/B
- Dielectric Strength 4500Vrms
- Weight: 200 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM4214S-2-060-0500	230v~	6	834.0	1+5/7+9	8.0	1
IM4214S-2-090-0500	230v~	9	556.0	1+5/7+9	12.0	1
IM4214S-2-120-0500	230v~	12	417.0	1+5/7+9	15.5	1
IM4214S-2-150-0500	230v~	15	334.0	1+5/7+9	19.5	1
IM4214S-2-180-0500	230v~	18	278.0	1+5/7+9	23.5	1
IM4214S-2-240-0500	230v~	24	208.0	1+5/7+9	31.0	1
IM4214D-2-060-0500	230v~	2× 6	2×417.0	1+5/6+7-9+10	2×7.8	2
IM4214D-2-075-0500	230v~	2× 7.5	2×334.0	1+5/6+7-9+10	2×9.8	2
IM4214D-2-090-0500	230v~	2× 9	2×278.0	1+5/6+7-9+10	2×11.8	2
IM4214D-2-120-0500	230v~	2×12	2×208.0	1+5/6+7-9+10	2×15.5	2
IM4214D-2-150-0500	230v~	2×15	2×167.0	1+5/6+7-9+10	2×19.5	2
IM4214D-2-180-0500	230v~	2×18	2×139.0	1+5/6+7-9+10	2×23.5	2
IM4214D-2-240-0500	230v~	2×24	2×104.0	1+5/6+7-9+10	2×31.0	2
IM4214S-1-060-0500	115v~	6	834.0	1+5/7+9	8.0	1
IM4214S-1-090-0500	115v~	9	556.0	1+5/7+9	12.0	1
IM4214S-1-120-0500	115v~	12	417.0	1+5/7+9	15.5	1
IM4214S-1-150-0500	115v~	15	334.0	1+5/7+9	19.5	1
IM4214S-1-180-0500	115v~	18	278.0	1+5/7+9	23.5	1
IM4214S-1-240-0500	115v~	24	208.0	1+5/7+9	31.0	1
IM4214D-1-060-0500	115v~	2× 6	2×417.0	1+5/6+7-9+10	2×7.8	2
IM4214D-1-075-0500	115v~	2× 7.5	2×334.0	1+5/6+7-9+10	2×9.8	2
IM4214D-1-090-0500	115v~	2× 9	2×278.0	1+5/6+7-9+10	2×11.8	2
IM4214D-1-120-0500	115v~	2×12	2×208.0	1+5/6+7-9+10	2×15.5	2
IM4214D-1-150-0500	115v~	2×15	2×167.0	1+5/6+7-9+10	2×19.5	2
IM4214D-1-180-0500	115v~	2×18	2×139.0	1+5/6+7-9+10	2×23.5	2
IM4214D-1-240-0500	115v~	2×24	2×104.0	1+5/6+7-9+10	2×31.0	2
IM4214S-1*-060-0500	2*115v~	6	834.0	1+2-4+5/7+9	8.0	3
IM4214S-1*-090-0500	2*115v~	9	556.0	1+2-4+5/7+9	12.0	3
IM4214S-1*-120-0500	2*115v~	12	417.0	1+2-4+5/7+9	15.5	3
IM4214S-1*-150-0500	2*115v~	15	334.0	1+2-4+5/7+9	19.5	3
IM4214S-1*-180-0500	2*115v~	18	278.0	1+2-4+5/7+9	23.5	3
IM4214S-1*-240-0500	2*115v~	24	208.0	1+2-4+5/7+9	31.0	3
IM4214D-1*-060-0500	2*115v~	2× 6	2×417.0	1+2-4+5/6+7-9+10	2×7.8	4
IM4214D-1*-090-0500	2*115v~	2× 9	2×278.0	1+2-4+5/6+7-9+10	2×11.8	4
IM4214D-1*-120-0500	2*115v~	2×12	2×208.0	1+2-4+5/6+7-9+10	2×15.5	4
IM4214D-1*-150-0500	2*115v~	2×15	2×167.0	1+2-4+5/6+7-9+10	2×19.5	4
IM4214D-1*-180-0500	2*115v~	2×18	2×139.0	1+2-4+5/6+7-9+10	2×23.5	4
IM4214D-1*-240-0500	2*115v~	2×24	2×104.0	1+2-4+5/6+7-9+10	2×31.0	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI42/20 8.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70 °C/B
- Dielectric Strength 4500Vrms
- Weight: 260 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM4220S-2-060-0800	230v~	6	1333.0	1+6/8+11	7.6	1
IM4220S-2-090-0800	230v~	9	888.0	1+6/8+11	11.5	1
IM4220S-2-120-0800	230v~	12	666.0	1+6/8+11	15.5	1
IM4220S-2-150-0800	230v~	15	533.0	1+6/8+11	19.0	1
IM4220S-2-180-0800	230v~	18	444.0	1+6/8+11	22.8	1
IM4220S-2-240-0800	230v~	24	333.0	1+6/8+11	30.0	1
IM4220D-2-060-0800	230v~	2× 6	2×666.0	1+6/7+8-11+12	2×8.0	2
IM4220D-2-075-0800	230v~	2× 7.5	2×533.0	1+6/7+8-11+12	2×10.0	2
IM4220D-2-090-0800	230v~	2× 9	2×444.0	1+6/7+8-11+12	2×11.5	2
IM4220D-2-120-0800	230v~	2×12	2×333.0	1+6/7+8-11+12	2×15.5	2
IM4220D-2-150-0800	230v~	2×15	2×266.0	1+6/7+8-11+12	2×19.0	2
IM4220D-2-180-0800	230v~	2×18	2×222.0	1+6/7+8-11+12	2×22.8	2
IM4220D-2-240-0800	230v~	2×24	2×166.0	1+6/7+8-11+12	2×30.0	2
IM4220S-1-060-0800	115v~	6	1333.0	1+6/8+11	7.6	1
IM4220S-1-090-0800	115v~	9	888.0	1+6/8+11	11.5	1
IM4220S-1-120-0800	115v~	12	666.0	1+6/8+11	15.5	1
IM4220S-1-150-0800	115v~	15	533.0	1+6/8+11	19.0	1
IM4220S-1-180-0800	115v~	18	444.0	1+6/8+11	22.8	1
IM4220S-1-240-0800	115v~	24	333.0	1+6/8+11	30.0	1
IM4220D-1-060-0800	115v~	2× 6	2×666.0	1+6/7+8-11+12	2×8.0	2
IM4220D-1-075-0800	115v~	2× 7.5	2×533.0	1+6/7+8-11+12	2×10.0	2
IM4220D-1-090-0800	115v~	2× 9	2×444.0	1+6/7+8-11+12	2×11.5	2
IM4220D-1-120-0800	115v~	2×12	2×333.0	1+6/7+8-11+12	2×15.5	2
IM4220D-1-150-0800	115v~	2×15	2×266.0	1+6/7+8-11+12	2×19.0	2
IM4220D-1-180-0800	115v~	2×18	2×222.0	1+6/7+8-11+12	2×22.8	2
IM4220D-1-240-0800	115v~	2×24	2×166.0	1+6/7+8-11+12	2×30.0	2
IM4220S-1*-060-0800	2*115v~	6	1333.0	1+3-4+6/8+11	7.6	3
IM4220S-1*-090-0800	2*115v~	9	888.0	1+3-4+6/8+11	11.5	3
IM4220S-1*-120-0800	2*115v~	12	666.0	1+3-4+6/8+11	15.5	3
IM4220S-1*-150-0800	2*115v~	15	533.0	1+3-4+6/8+11	19.0	3
IM4220S-1*-180-0800	2*115v~	18	444.0	1+3-4+6/8+11	22.8	3
IM4220S-1*-240-0800	2*115v~	24	333.0	1+3-4+6/8+11	30.0	3
IM4220D-1*-060-0800	2*115v~	2× 6	2×666.0	1+3-4+6/7+8-11+12	2×8.0	4
IM4220D-1*-090-0800	2*115v~	2× 9	2×444.0	1+3-4+6/7+8-11+12	2×11.5	4
IM4220D-1*-120-0800	2*115v~	2×12	2×333.0	1+3-4+6/7+8-11+12	2×15.5	4
IM4220D-1*-150-0800	2*115v~	2×15	2×266.0	1+3-4+6/7+8-11+12	2×19.0	4
IM4220D-1*-180-0800	2*115v~	2×18	2×222.0	1+3-4+6/7+8-11+12	2×22.8	4
IM4220D-1*-240-0800	2*115v~	2×24	2×166.0	1+3-4+6/7+8-11+12	2×30.0	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI48/12 4.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70°C/B
- Dielectric Strength 4500Vrms
- Weight: 205 grams


According to:



Dimension in mm:




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM4812S-2-060-0400	230v~	6	666.0	2+6/10+12	7.6	1
IM4812S-2-090-0400	230v~	9	444.0	2+6/10+12	11.5	1
IM4812S-2-120-0400	230v~	12	333.0	2+6/10+12	15.5	1
IM4812S-2-150-0400	230v~	15	266.0	2+6/10+12	19.0	1
IM4812S-2-180-0400	230v~	18	222.0	2+6/10+12	22.8	1
IM4812S-2-240-0400	230v~	24	166.0	2+6/10+12	30.0	1
IM4812D-2-060-0400	230v~	2×6	2×333.0	2+6/8+10-12+14	2×8.0	2
IM4812D-2-075-0400	230v~	2×7.5	2×266.0	2+6/8+10-12+14	2×10.0	2
IM4812D-2-090-0400	230v~	2×9	2×222.0	2+6/8+10-12+14	2×11.5	2
IM4812D-2-120-0400	230v~	2×12	2×166.0	2+6/8+10-12+14	2×15.5	2
IM4812D-2-150-0400	230v~	2×15	2×133.0	2+6/8+10-12+14	2×19.0	2
IM4812D-2-180-0400	230v~	2×18	2×111.0	2+6/8+10-12+14	2×22.8	2
IM4812D-2-240-0400	230v~	2×24	2×83.0	2+6/8+10-12+14	2×30.0	2
IM4812S-1-060-0400	115v~	6	666.0	2+6/10+12	7.6	1
IM4812S-1-090-0400	115v~	9	444.0	2+6/10+12	11.5	1
IM4812S-1-120-0400	115v~	12	333.0	2+6/10+12	15.5	1
IM4812S-1-150-0400	115v~	15	266.0	2+6/10+12	19.0	1
IM4812S-1-180-0400	115v~	18	222.0	2+6/10+12	22.8	1
IM4812S-1-240-0400	115v~	24	166.0	2+6/10+12	30.0	1
IM4812D-1-060-0400	115v~	2×6	2×333.0	2+6/8+10-12+14	2×8.0	2
IM4812D-1-075-0400	115v~	2×7.5	2×266.0	2+6/8+10-12+14	2×10.0	2
IM4812D-1-090-0400	115v~	2×9	2×222.0	2+6/8+10-12+14	2×11.5	2
IM4812D-1-120-0400	115v~	2×12	2×166.0	2+6/8+10-12+14	2×15.5	2
IM4812D-1-150-0400	115v~	2×15	2×133.0	2+6/8+10-12+14	2×19.0	2
IM4812D-1-180-0400	115v~	2×18	2×111.0	2+6/8+10-12+14	2×22.8	2
IM4812D-1-240-0400	115v~	2×24	2×83.0	2+6/8+10-12+14	2×30.0	2
IM4812S-1*-060-0400	2*115v~	6	666.0	1+3-5+7/10+12	7.6	3
IM4812S-1*-090-0400	2*115v~	9	444.0	1+3-5+7/10+12	11.5	3
IM4812S-1*-120-0400	2*115v~	12	333.0	1+3-5+7/10+12	15.5	3
IM4812S-1*-150-0400	2*115v~	15	266.0	1+3-5+7/10+12	19.0	3
IM4812S-1*-180-0400	2*115v~	18	222.0	1+3-5+7/10+12	22.8	3
IM4812S-1*-240-0400	2*115v~	24	250.0	1+3-5+7/10+12	30.0	3
IM4812D-1*-060-0400	2*115v~	2×6	2×333.0	1+3-5+7/8+10-12+14	2×8.0	4
IM4812D-1*-090-0400	2*115v~	2×9	2×222.0	1+3-5+7/8+10-12+14	2×11.5	4
IM4812D-1*-120-0400	2*115v~	2×12	2×166.0	1+3-5+7/8+10-12+14	2×15.5	4
IM4812D-1*-150-0400	2*115v~	2×15	2×133.0	1+3-5+7/8+10-12+14	2×19.0	4
IM4812D-1*-180-0400	2*115v~	2×18	2×111.0	1+3-5+7/8+10-12+14	2×22.8	4
IM4812D-1*-240-0400	2*115v~	2×24	2×83.0	1+3-5+7/8+10-12+14	2×30.0	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI48/16.8 10.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 40 °C/B
- Dielectric Strength 4500Vrms
- Weight: 295 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM4816S-2-060-1000	230v~	6	1666.0	1+6/8+11	7.6	1
IM4816S-2-090-1000	230v~	9	1111.0	1+6/8+11	11.5	1
IM4816S-2-120-1000	230v~	12	834.0	1+6/8+11	15.5	1
IM4816S-2-150-1000	230v~	15	666.0	1+6/8+11	19.0	1
IM4816S-2-180-1000	230v~	18	555.0	1+6/8+11	22.8	1
IM4816S-2-240-1000	230v~	24	416.0	1+6/8+11	30.0	1
IM4816D-2-060-1000	230v~	2× 6	2×834.0	1+6/7+8-11+12	2×8.0	2
IM4816D-2-075-1000	230v~	2× 7.5	2×666.0	1+6/7+8-11+12	2×10.0	2
IM4816D-2-090-1000	230v~	2× 9	2×555.0	1+6/7+8-11+12	2×11.5	2
IM4816D-2-120-1000	230v~	2×12	2×416.0	1+6/7+8-11+12	2×15.5	2
IM4816D-2-150-1000	230v~	2×15	2×333.0	1+6/7+8-11+12	2×19.0	2
IM4816D-2-180-1000	230v~	2×18	2×277.0	1+6/7+8-11+12	2×22.8	2
IM4816D-2-240-1000	230v~	2×24	2×208.0	1+6/7+8-11+12	2×30.0	2
IM4816S-1-060-1000	115v~	6	1666.0	1+6/8+11	7.6	1
IM4816S-1-090-1000	115v~	9	1111.0	1+6/8+11	11.5	1
IM4816S-1-120-1000	115v~	12	834.0	1+6/8+11	15.5	1
IM4816S-1-150-1000	115v~	15	666.0	1+6/8+11	19.0	1
IM4816S-1-180-1000	115v~	18	555.0	1+6/8+11	22.8	1
IM4816S-1-240-1000	115v~	24	416.0	1+6/8+11	30.0	1
IM4816D-1-060-1000	115v~	2× 6	2×834.0	1+6/7+8-11+12	2×8.0	2
IM4816D-1-075-1000	115v~	2× 7.5	2×666.0	1+6/7+8-11+12	2×10.0	2
IM4816D-1-090-1000	115v~	2× 9	2×555.0	1+6/7+8-11+12	2×11.5	2
IM4816D-1-120-1000	115v~	2×12	2×416.0	1+6/7+8-11+12	2×15.5	2
IM4816D-1-150-1000	115v~	2×15	2×333.0	1+6/7+8-11+12	2×19.0	2
IM4816D-1-180-1000	115v~	2×18	2×277.0	1+6/7+8-11+12	2×22.8	2
IM4816D-1-240-1000	115v~	2×24	2×208.0	1+6/7+8-11+12	2×30.0	2
IM4816S-1*-060-1000	2*115v~	6	1666.0	1+3-4+6/8+11	7.6	3
IM4816S-1*-090-1000	2*115v~	9	1111.0	1+3-4+6/8+11	11.5	3
IM4816S-1*-120-1000	2*115v~	12	834.0	1+3-4+6/8+11	15.5	3
IM4816S-1*-150-1000	2*115v~	15	666.0	1+3-4+6/8+11	19.0	3
IM4816S-1*-180-1000	2*115v~	18	555.0	1+3-4+6/8+11	22.8	3
IM4816S-1*-240-1000	2*115v~	24	416.0	1+3-4+6/8+11	30.0	3
IM4816D-1*-060-1000	2*115v~	2× 6	2×834.0	1+3-4+6/7+8-11+12	2×8.0	4
IM4816D-1*-090-1000	2*115v~	2× 9	2×555.0	1+3-4+6/7+8-11+12	2×11.5	4
IM4816D-1*-120-1000	2*115v~	2×12	2×416.0	1+3-4+6/7+8-11+12	2×15.5	4
IM4816D-1*-150-1000	2*115v~	2×15	2×333.0	1+3-4+6/7+8-11+12	2×19.0	4
IM4816D-1*-180-1000	2*115v~	2×18	2×277.0	1+3-4+6/7+8-11+12	2×22.8	4
IM4816D-1*-240-1000	2*115v~	2×24	2×208.0	1+3-4+6/7+8-11+12	2×30.0	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI48/18.6 11.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70 °C/B
- Dielectric Strength 4500Vrms
- Weight: 325 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM4818S-2-060-1100	230v~	6	1833.0	1+5/7+9	7.6	1
IM4818S-2-090-1100	230v~	9	1222.0	1+5/7+9	11.5	1
IM4818S-2-120-1100	230v~	12	916.0	1+5/7+9	15.5	1
IM4818S-2-150-1100	230v~	15	733.0	1+5/7+9	19.0	1
IM4818S-2-180-1100	230v~	18	611.0	1+5/7+9	22.8	1
IM4818S-2-240-1100	230v~	24	458.0	1+5/7+9	30.0	1
IM4818D-2-060-1100	230v~	2× 6	2×916.0	1+5/6+7-9+10	2×8.0	2
IM4818D-2-075-1100	230v~	2× 7.5	2×733.0	1+5/6+7-9+10	2×10.0	2
IM4818D-2-090-1100	230v~	2× 9	2×611.0	1+5/6+7-9+10	2×11.5	2
IM4818D-2-120-1100	230v~	2×12	2×458.0	1+5/6+7-9+10	2×15.5	2
IM4818D-2-150-1100	230v~	2×15	2×366.0	1+5/6+7-9+10	2×19.0	2
IM4818D-2-180-1100	230v~	2×18	2×305.0	1+5/6+7-9+10	2×22.8	2
IM4818D-2-240-1100	230v~	2×24	2×229.0	1+5/6+7-9+10	2×30.0	2
IM4818S-1-060-1100	115v~	6	1833.0	1+5/7+9	7.6	1
IM4818S-1-090-1100	115v~	9	1222.0	1+5/7+9	11.5	1
IM4818S-1-120-1100	115v~	12	916.0	1+5/7+9	15.5	1
IM4818S-1-150-1100	115v~	15	733.0	1+5/7+9	19.0	1
IM4818S-1-180-1100	115v~	18	611.0	1+5/7+9	22.8	1
IM4818S-1-240-1100	115v~	24	458.0	1+5/7+9	30.0	1
IM4818D-1-060-1100	115v~	2× 6	2×916.0	1+5/6+7-9+10	2×8.0	2
IM4818D-1-075-1100	115v~	2× 7.5	2×733.0	1+5/6+7-9+10	2×10.0	2
IM4818D-1-090-1100	115v~	2× 9	2×611.0	1+5/6+7-9+10	2×11.5	2
IM4818D-1-120-1100	115v~	2×12	2×458.0	1+5/6+7-9+10	2×15.5	2
IM4818D-1-150-1100	115v~	2×15	2×366.0	1+5/6+7-9+10	2×19.0	2
IM4818D-1-180-1100	115v~	2×18	2×305.0	1+5/6+7-9+10	2×22.8	2
IM4818D-1-240-1100	115v~	2×24	2×229.0	1+5/6+7-9+10	2×30.0	2
IM4818S-1*-060-1100	2*115v~	6	1833.0	1+2-4+5/7+9	7.6	3
IM4818S-1*-090-1100	2*115v~	9	1222.0	1+2-4+5/7+9	11.5	3
IM4818S-1*-120-1100	2*115v~	12	916.0	1+2-4+5/7+9	15.5	3
IM4818S-1*-150-1100	2*115v~	15	733.0	1+2-4+5/7+9	19.0	3
IM4818S-1*-180-1100	2*115v~	18	611.0	1+2-4+5/7+9	22.8	3
IM4818S-1*-240-1100	2*115v~	24	458.0	1+2-4+5/7+9	30.0	3
IM4818D-1*-060-1100	2*115v~	2× 6	2×916.0	1+2-4+5/6+7-9+10	2×8.0	4
IM4818D-1*-090-1100	2*115v~	2× 9	2×611.0	1+2-4+5/6+7-9+10	2×11.5	4
IM4818D-1*-120-1100	2*115v~	2×12	2×458.0	1+2-4+5/6+7-9+10	2×15.5	4
IM4818D-1*-150-1100	2*115v~	2×15	2×366.0	1+2-4+5/6+7-9+10	2×19.0	4
IM4818D-1*-180-1100	2*115v~	2×18	2×305.0	1+2-4+5/6+7-9+10	2×22.8	4
IM4818D-1*-240-1100	2*115v~	2×24	2×229.0	1+2-4+5/6+7-9+10	2×30.0	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI48/20 12.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 70 °C/B
- Dielectric Strength 4500Vrms
- Weight: 350 grams


Accrding to:



Dimension in mm :




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM4820S-2-060-1200	230v~	6	2000.0	1+6/8+11	7.6	1
IM4820S-2-090-1200	230v~	9	1333.0	1+6/8+11	11.5	1
IM4820S-2-120-1200	230v~	12	1000.0	1+6/8+11	15.5	1
IM4820S-2-150-1200	230v~	15	800.0	1+6/8+11	19.0	1
IM4820S-2-180-1200	230v~	18	666.0	1+6/8+11	22.8	1
IM4820S-2-240-1200	230v~	24	500.0	1+6/8+11	30.0	1
IM4820D-2-060-1200	230v~	2× 6	2×1000.0	1+6/7+8-11+12	2×8.0	2
IM4820D-2-075-1200	230v~	2× 7.5	2×800.0	1+6/7+8-11+12	2×10.0	2
IM4820D-2-090-1200	230v~	2× 9	2×666.0	1+6/7+8-11+12	2×11.5	2
IM4820D-2-120-1200	230v~	2×12	2×500.0	1+6/7+8-11+12	2×15.5	2
IM4820D-2-150-1200	230v~	2×15	2×400.0	1+6/7+8-11+12	2×19.0	2
IM4820D-2-180-1200	230v~	2×18	2×333.0	1+6/7+8-11+12	2×22.8	2
IM4820D-2-240-1200	230v~	2×24	2×250.0	1+6/7+8-11+12	2×30.0	2
IM4820S-1-060-1200	115v~	6	2000.0	1+6/8+11	7.6	1
IM4820S-1-090-1200	115v~	9	1333.0	1+6/8+11	11.5	1
IM4820S-1-120-1200	115v~	12	1000.0	1+6/8+11	15.5	1
IM4820S-1-150-1200	115v~	15	800.0	1+6/8+11	19.0	1
IM4820S-1-180-1200	115v~	18	666.0	1+6/8+11	22.8	1
IM4820S-1-240-1200	115v~	24	500.0	1+6/8+11	30.0	1
IM4820D-1-060-1200	115v~	2× 6	2×1000.0	1+6/7+8-11+12	2×8.0	2
IM4820D-1-075-1200	115v~	2× 7.5	2×800.0	1+6/7+8-11+12	2×10.0	2
IM4820D-1-090-1200	115v~	2× 9	2×666.0	1+6/7+8-11+12	2×11.5	2
IM4820D-1-120-1200	115v~	2×12	2×500.0	1+6/7+8-11+12	2×15.5	2
IM4820D-1-150-1200	115v~	2×15	2×400.0	1+6/7+8-11+12	2×19.0	2
IM4820D-1-180-1200	115v~	2×18	2×333.0	1+6/7+8-11+12	2×22.8	2
IM4820D-1-240-1200	115v~	2×24	2×250.0	1+6/7+8-11+12	2×30.0	2
IM4820S-1*-060-1200	2*115v~	6	2000.0	1+3-4+6/8+11	7.6	3
IM4820S-1*-090-1200	2*115v~	9	1333.0	1+3-4+6/8+11	11.5	3
IM4820S-1*-120-1200	2*115v~	12	1000.0	1+3-4+6/8+11	15.5	3
IM4820S-1*-150-1200	2*115v~	15	800.0	1+3-4+6/8+11	19.0	3
IM4820S-1*-180-1200	2*115v~	18	666.0	1+3-4+6/8+11	22.8	3
IM4820S-1*-240-1200	2*115v~	24	500.0	1+3-4+6/8+11	30.0	3
IM4820D-1*-060-1200	2*115v~	2× 6	2×1000.0	1+3-4+6/7+8-11+12	2×8.0	4
IM4820D-1*-090-1200	2*115v~	2× 9	2×666.0	1+3-4+6/7+8-11+12	2×11.5	4
IM4820D-1*-120-1200	2*115v~	2×12	2×500.0	1+3-4+6/7+8-11+12	2×15.5	4
IM4820D-1*-150-1200	2*115v~	2×15	2×400.0	1+3-4+6/7+8-11+12	2×19.0	4
IM4820D-1*-180-1200	2*115v~	2×18	2×333.0	1+3-4+6/7+8-11+12	2×22.8	4
IM4820D-1*-240-1200	2*115v~	2×24	2×250.0	1+3-4+6/7+8-11+12	2×30.0	4


No. 1




No. 2



No. 3



No. 4



Type

Power


EI54/18.8 16.0VA

- Vacuum Filled Casting
- Split Bobbin Design
- Temperature Class ta 40°C/B
- Dielectric Strength 4500Vrms
- Weight: 410 grams


Accrording to:



Dimension in mm:




BOTTOM VIEW




SIDE VIEW

Part No.	Primary [V]	Secondary [V]	Current [mA]	Pin	No-Load Voltage [V]	Schematic No.
IM5418S-2-060-1600	230v~	6	2666.0	1+7/9+13	7.5	1
IM5418S-2-090-1600	230v~	9	1777.0	1+7/9+13	11.3	1
IM5418S-2-120-1600	230v~	12	1333.0	1+7/9+13	14.9	1
IM5418S-2-150-1600	230v~	15	1066.0	1+7/9+13	18.5	1
IM5418S-2-180-1600	230v~	18	888.0	1+7/9+13	22.0	1
IM5418S-2-240-1600	230v~	24	666.0	1+7/9+13	29.6	1
IM5418D-2-060-1600	230v~	2× 6	2×1333.0	1+7/8+9-13+14	2×7.5	2
IM5418D-2-075-1600	230v~	2× 7.5	2×1066.0	1+7/8+9-13+14	2×9.2	2
IM5418D-2-090-1600	230v~	2× 9	2×888.0	1+7/8+9-13+14	2×11.3	2
IM5418D-2-120-1600	230v~	2×12	2×666.0	1+7/8+9-13+14	2×15.0	2
IM5418D-2-150-1600	230v~	2×15	2×533.0	1+7/8+9-13+14	2×18.7	2
IM5418D-2-180-1600	230v~	2×18	2×444.0	1+7/8+9-13+14	2×22.4	2
IM5418D-2-240-1600	230v~	2×24	2×333.0	1+7/8+9-13+14	2×29.0	2
IM5418S-1-060-1600	115v~	6	2666.0	1+7/9+13	7.5	1
IM5418S-1-090-1600	115v~	9	1777.0	1+7/9+13	11.3	1
IM5418S-1-120-1600	115v~	12	1333.0	1+7/9+13	14.9	1
IM5418S-1-150-1600	115v~	15	1066.0	1+7/9+13	18.5	1
IM5418S-1-180-1600	115v~	18	888.0	1+7/9+13	22.0	1
IM5418S-1-240-1600	115v~	24	666.0	1+7/9+13	29.6	1
IM5418D-1-060-1600	115v~	2× 6	2×1333.0	1+7/8+9-13+14	2×7.5	2
IM5418D-1-075-1600	115v~	2× 7.5	2×1066.0	1+7/8+9-13+14	2×9.2	2
IM5418D-1-090-1600	115v~	2× 9	2×888.0	1+7/8+9-13+14	2×11.3	2
IM5418D-1-120-1600	115v~	2×12	2×666.0	1+7/8+9-13+14	2×15.0	2
IM5418D-1-150-1600	115v~	2×15	2×533.0	1+7/8+9-13+14	2×18.7	2
IM5418D-1-180-1600	115v~	2×18	2×444.0	1+7/8+9-13+14	2×22.4	2
IM5418D-1-240-1600	115v~	2×24	2×333.0	1+7/8+9-13+14	2×29.0	2

No. 1



No. 2



Power

- Potted Under Vacuum
- Two Compartments Bobbins
- Temperature Class ta 40°C/B
- Dielectric Strength 3750Vrms

CE   

Diagram of the bottom view of the PCB. Dimensions are indicated in millimeters: overall width 53, overall height 44, mounting hole diameter $\varnothing 2.5$, and mounting hole spacing 47.5. Pin locations are numbered 1 through 15. Pin 1 is at the top left, and pins 2 through 15 are arranged in two rows along the bottom edge.

SIDE VIEW

Circuit	Power	Dimension A	Weight
UI30x5.5	2VA/3VA	A=17mm	120g
UI30x7.5	4VA	A=19mm	150g
UI30x10.5	6VA	A=22mm	185g
UI30x16.5	10VA	A=28mm	260g

Part No.	Primary [V]	Secondary [V]	Current [mA]	No-Load Voltage [V]	Schematic No.
UI30×5.5			2VA		
IMU30D-1-060-0200	115v~	2× 6	2×167	2×10.2	2
IMU30D-1-090-0200	115v~	2× 9	2×111	2×15.9	2
IMU30D-1-120-0200	115v~	2× 12	2×83	2×20.4	2
IMU30D-1-150-0200	115v~	2× 15	2×67	2×25.5	2
IMU30D-1-180-0200	115v~	2× 18	2×56	2×30.6	2
IMU30D-1-240-0200	115v~	2× 24	2×42	2×40.8	2
UI30×5.5			3VA		
IMU30D-1-060-0300	115v~	2× 6	2×250	2×9.8	2
IMU30D-1-090-0300	115v~	2× 9	2×167	2×14.7	2
IMU30D-1-120-0300	115v~	2× 12	2×125	2×19.6	2
IMU30D-1-150-0300	115v~	2× 15	2×100	2×24.5	2
IMU30D-1-180-0300	115v~	2× 18	2×83	2×29.5	2
IMU30D-1-240-0300	115v~	2× 24	2×63	2×39.3	2
UI30×7.5			4VA		
IMU30D-1-060-0400	115v~	2× 6	2×333	2×9.4	2
IMU30D-1-090-0400	115v~	2× 9	2×222	2×14.0	2
IMU30D-1-120-0400	115v~	2× 12	2×167	2×18.6	2
IMU30D-1-150-0400	115v~	2× 15	2×133	2×23.3	2
IMU30D-1-180-0400	115v~	2× 18	2×111	2×28.0	2
IMU30D-1-240-0400	115v~	2× 24	2×83	2×37.4	2
UI30×10.5			6VA		
IMU30D-1-060-0600	115v~	2× 6	2×500	2×8.1	2
IMU30D-1-090-0600	115v~	2× 9	2×333	2×12.1	2
IMU30D-1-120-0600	115v~	2× 12	2×250	2×16.2	2
IMU30D-1-150-0600	115v~	2× 15	2×200	2×20.2	2
IMU30D-1-180-0600	115v~	2× 18	2×167	2×24.3	2
IMU30D-1-240-0600	115v~	2× 24	2×125	2×32.3	2
UI30×10.5			10VA		
IMU30D-1-060-1000	115v~	2× 6	2×833	2×7.9	2
IMU30D-1-090-1000	115v~	2× 9	2×556	2×11.9	2
IMU30D-1-120-1000	115v~	2× 12	2×417	2×15.9	2
IMU30D-1-150-1000	115v~	2× 15	2×333	2×19.8	2
IMU30D-1-180-1000	115v~	2× 18	2×278	2×23.7	2
IMU30D-1-240-1000	115v~	2× 24	2×208	2×31.7	2

No. 1

No. 2

Secondary Voltage Doubled

Double The Secondary Current

Power

- Potted Under Vacuum
- Two Compartments Bobbins
- Temperature Class ta 40°C/B
- Dielectric Strength 3750Vrms

CE

Diagram of the bottom view of the PCB. Dimensions are indicated in millimeters: overall width 53, overall height 44, mounting hole diameter $\phi 2.5$, and distance between mounting holes 37.5. Pin locations are numbered 1 through 16. The text "BOTTOM VIEW" is written in red at the bottom.

Type

Power


UI39 10VA~30VA

- Potted Under Vacuum
- Two Compartments Bobbins
- Temperature Class ta 40°C/B
- Dielectric Strength 3750Vrms


Accrording to:



Dimension in mm :

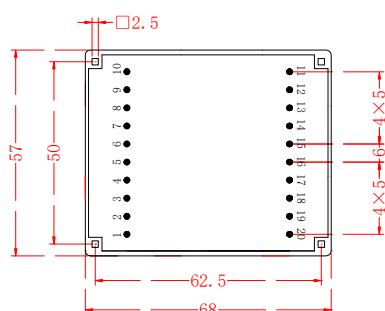


BOTTOM VIEW

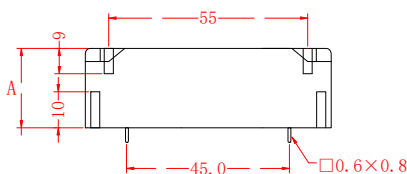


SIDE VIEW

Circuit	Power	Dimension A	Weight
UI39x8.0	10VA	A=22mm	280g
UI39x10.2	14VA	A=24mm	315g
UI39x13.5	18VA	A=27mm	385g
UI39x17.0	24VA	A=31mm	450g
UI39x21.0	30VA	A=35mm	530g

Part No.	Primary [V]	Secondary [V]	Current [mA]	No-Load Voltage [V]	Schematic No.
UI39×8			10VA		
IMU39D-1-060-1000	115v~	2× 6	2×833	2×8.2	2
IMU39D-1-090-1000	115v~	2× 9	2×555	2×12.3	2
IMU39D-1-120-1000	115v~	2× 12	2×416	2×16.4	2
IMU39D-1-150-1000	115v~	2× 15	2×333	2×20.5	2
IMU39D-1-180-1000	115v~	2× 18	2×277	2×24.6	2
IMU39D-1-240-1000	115v~	2× 24	2×208	2×32.8	2
UI39×10.2			14VA		
IMU39D-1-060-1400	115v~	2× 6	2×1167	2×7.5	2
IMU39D-1-090-1400	115v~	2× 9	2×778	2×10.9	2
IMU39D-1-120-1400	115v~	2× 12	2×583	2×15.0	2
IMU39D-1-150-1400	115v~	2× 15	2×467	2×18.7	2
IMU39D-1-180-1400	115v~	2× 18	2×389	2×22.4	2
IMU39D-1-240-1400	115v~	2× 24	2×292	2×30.2	2
UI39×13.5			18VA		
IMU39D-1-060-1800	115v~	2× 6	2×1500	2×7.4	2
IMU39D-1-090-1800	115v~	2× 9	2×1000	2×11.0	2
IMU39D-1-120-1800	115v~	2× 12	2×750	2×14.7	2
IMU39D-1-150-1800	115v~	2× 15	2×600	2×18.3	2
IMU39D-1-180-1800	115v~	2× 18	2×500	2×22.0	2
IMU39D-1-240-1800	115v~	2× 24	2×375	2×29.4	2
UI39×17			24VA		
IMU39D-1-060-2400	115v~	2× 6	2×2000	2×7.1	2
IMU39D-1-090-2400	115v~	2× 9	2×1333	2×10.6	2
IMU39D-1-120-2400	115v~	2× 12	2×1000	2×14.1	2
IMU39D-1-150-2400	115v~	2× 15	2×800	2×17.6	2
IMU39D-1-180-2400	115v~	2× 18	2×667	2×21.2	2
IMU39D-1-240-2400	115v~	2× 24	2×500	2×28.3	2
UI39×21			30VA		
IMU39D-1-060-3000	115v~	2× 6	2×2500	2×6.7	2
IMU39D-1-090-3000	115v~	2× 9	2×1667	2×10.1	2
IMU39D-1-120-3000	115v~	2× 12	2×1250	2×13.5	2
IMU39D-1-150-3000	115v~	2× 15	2×1000	2×16.8	2
IMU39D-1-180-3000	115v~	2× 18	2×833	2×20.2	2
IMU39D-1-240-3000	115v~	2× 24	2×625	2×27.0	2

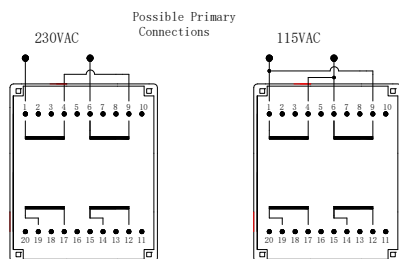

Possible Primary Connections

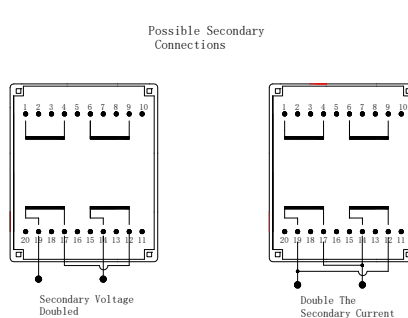

Possible Secondary Connections

No. 1

No. 2

Type

Power


UI39 10VA~30VA

- Potted Under Vacuum
- Two Compartments Bobbins
- Temperature Class ta 40 °C/B
- Dielectric Strength 3750Vrms


Accrding to:



Dimension in mm :

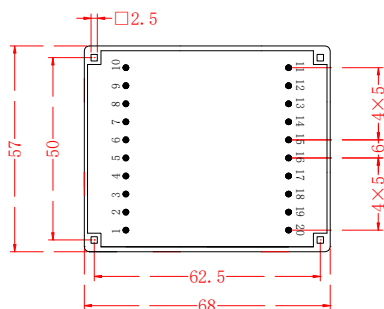


BOTTOM VIEW

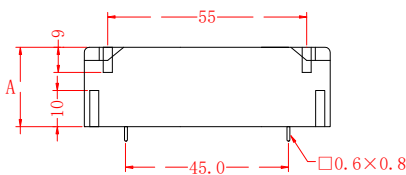

SIDE VIEW

Circuit	Power	Dimension A	Weight
UI39x8.0	10VA	A=22mm	280g
UI39x10.2	14VA	A=24mm	315g
UI39x13.5	18VA	A=27mm	385g
UI39x17.0	24VA	A=31mm	450g
UI39x21.0	30VA	A=35mm	530g

Part No.	Primary [V]	Secondary [V]	Current [mA]	No-Load Voltage [V]	Schematic No.
UI39x8 10VA					
IMU39D-2-060-1000	230v~	2× 6	2×833	2×8.2	1
IMU39D-2-090-1000	230v~	2× 9	2×555	2×12.3	1
IMU39D-2-120-1000	230v~	2× 12	2×416	2×16.4	1
IMU39D-2-150-1000	230v~	2× 15	2×333	2×20.5	1
IMU39D-2-180-1000	230v~	2× 18	2×277	2×24.6	1
IMU39D-2-240-1000	230v~	2× 24	2×208	2×32.8	1
UI39x10.2 14VA					
IMU39D-2-060-1400	230v~	2× 6	2×1167	2×7.5	1
IMU39D-2-090-1400	230v~	2× 9	2×778	2×10.9	1
IMU39D-2-120-1400	230v~	2× 12	2×583	2×15.0	1
IMU39D-2-150-1400	230v~	2× 15	2×467	2×18.7	1
IMU39D-2-180-1400	230v~	2× 18	2×389	2×22.4	1
IMU39D-2-240-1400	230v~	2× 24	2×292	2×30.2	1
UI39x13.5 18VA					
IMU39D-2-060-1800	230v~	2× 6	2×1500	2×7.4	1
IMU39D-2-090-1800	230v~	2× 9	2×1000	2×11.0	1
IMU39D-2-120-1800	230v~	2× 12	2×750	2×14.7	1
IMU39D-2-150-1800	230v~	2× 15	2×600	2×18.3	1
IMU39D-2-180-1800	230v~	2× 18	2×500	2×22.0	1
IMU39D-2-240-1800	230v~	2× 24	2×375	2×29.4	1
UI39x17 24VA					
IMU39D-2-060-2400	230v~	2× 6	2×2000	2×7.1	1
IMU39D-2-090-2400	230v~	2× 9	2×1333	2×10.6	1
IMU39D-2-120-2400	230v~	2× 12	2×1000	2×14.1	1
IMU39D-2-150-2400	230v~	2× 15	2×800	2×17.6	1
IMU39D-2-180-2400	230v~	2× 18	2×667	2×21.2	1
IMU39D-2-240-2400	230v~	2× 24	2×500	2×28.3	1
UI39x21 30VA					
IMU39D-2-060-3000	230v~	2× 6	2×2500	2×6.7	1
IMU39D-2-090-3000	230v~	2× 9	2×1667	2×10.1	1
IMU39D-2-120-3000	230v~	2× 12	2×1250	2×13.5	1
IMU39D-2-150-3000	230v~	2× 15	2×1000	2×16.8	1
IMU39D-2-180-3000	230v~	2× 18	2×833	2×20.2	1
IMU39D-2-240-3000	230v~	2× 24	2×625	2×27.0	1

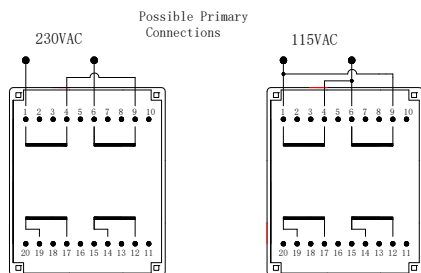

No. 1

No. 2

